



EntelliGuard® G Circuit Breaker Accessories

Back Connected Terminations for Cassette

**Back Connected Terminations
Cassette Envelope 3**

Terminal assemblies are supplied with the EntelliGuard breaker.

! WARNING: Before installing any accessories, turn the breaker OFF, disconnect it from all voltage sources, and discharge the closing springs.

! AVERTISSEMENT: Avant d'installer tout accessoire, mettre le disjoncteur en position OFF, le déconnecter de toute tension d'alimentation, et décharger les ressorts d'armement

Back Connected Terminations Assembly Procedure:

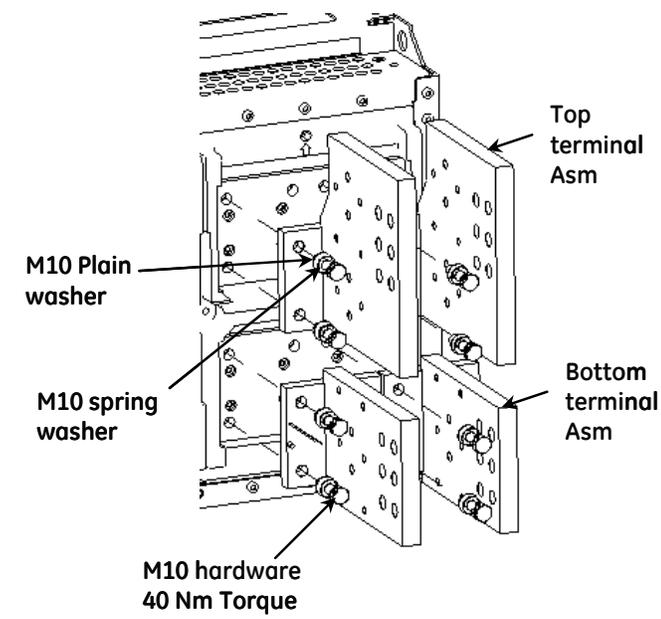


Fig A. Back Connected Terminations

**Table 1. Back Connected Terminations
Catalog numbers**

| Envelope Size | Catalog # | Description | TYPE |
|---------------|------------|-------------|--------|
| Envelope 3 | GBB360TBC3 | Top side | 3 pole |
| | GBB360BBC3 | Bottom side | 3 pole |
| | GBB360TBC4 | Top side | 4 pole |
| | GBB360BBC4 | Bottom side | 4 pole |

1. Turn the breaker off and discharge the closing springs by depressing the OFF and ON buttons in the sequence OFF-ON-OFF. Verify that the breaker OFF-ON indicator shows OFF on a green background and that the charge indicator shows DISCHARGE on a white background. If installing in a draw-out type breaker remove breaker from cassette before continuing.
2. Assemble the outer pole bottom & top Back Connected Termination assemblies first to the cassette back terminal support as shown in Fig A.
3. Terminal assemblies to be tightened with M10 hardware's as shown in Fig A, to 40 Nm (29.5 ft-lbs) torque.
4. Assemble the heat sinks LH & RH as shown in Fig B on the outer poles first, and tightened them to 14 Nm (10.3 ft-lbs) torque.
5. Repeat the above mounting procedure for remaining adjacent poles.
6. Assemble remaining terminal assemblies similarly on all the poles so as to populate as 3pole / 4 pole breaker fig C & Fig D.
7. The bus bars to be supported within 200mm distance and tightened to 80Nm (59 ft-lbs) torque

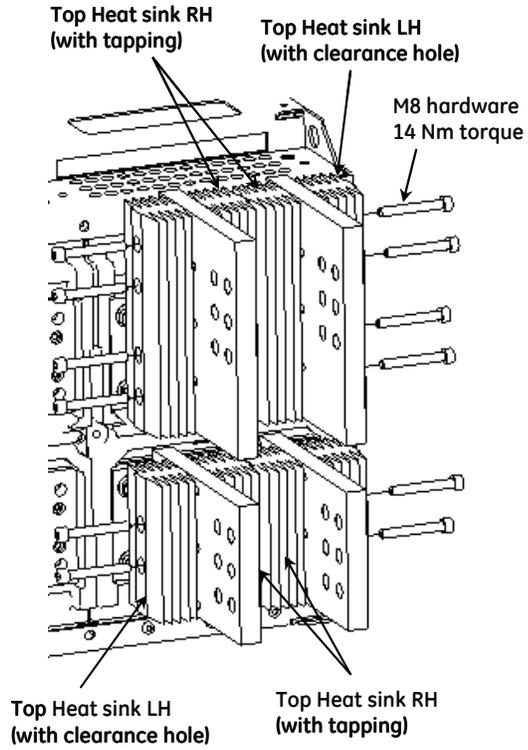


Fig B. Heat sink mounting to terminal assembly

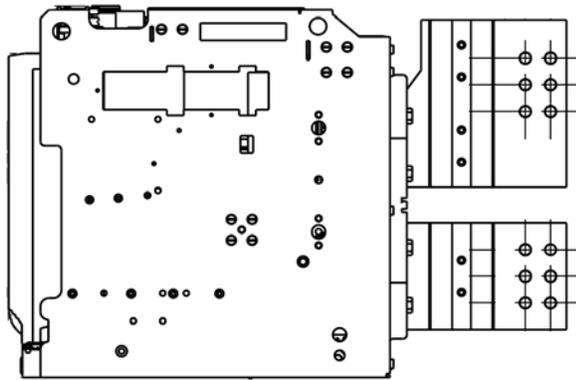


Fig E. Envelope 3, Side view

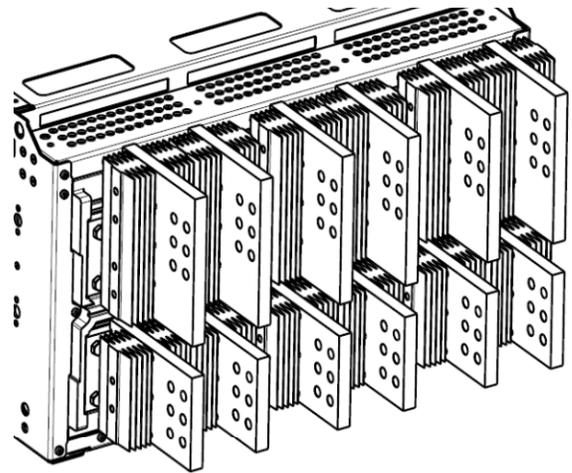


Fig C. Envelope 3, 3 Pole Assembly

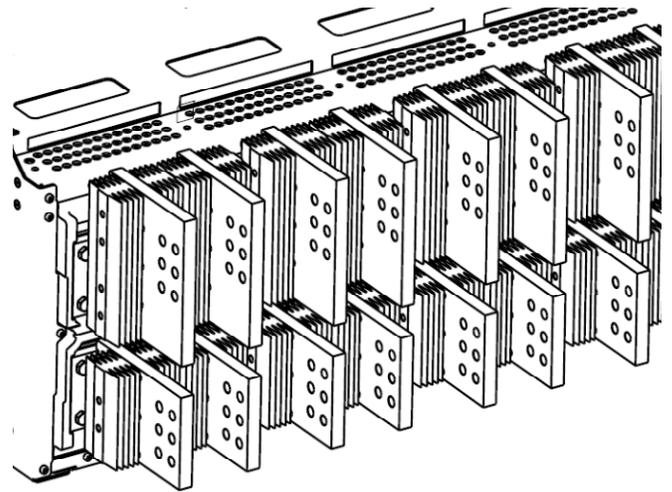


Fig D. Envelope 3, 4 Pole Assembly

These instructions do not purport to cover all details or variations in equipment nor, to provide contingency to be met in connection with installation, operation, or maintenance. Should further information be desired, or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to GE.

GE
41 Woodford Ave, Plainville, CT 06062
www.geelectrical.com

© 2009 General Electric Company



DEH-41437 R1 (04/09)