





INSIDE VIEW OF CABINET DOOR

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
D	S-8154	11/22/04	GG FS

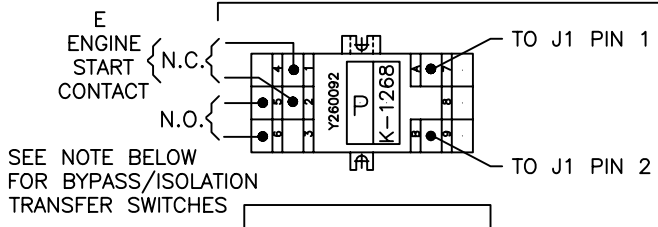


SEE NOTE BELOW FOR BYPASS/ISOLATION TRANSFER SWITCHES


SPACE FOR OPTIONAL OPTO INPUT/RELAY OUTPUT MODULES

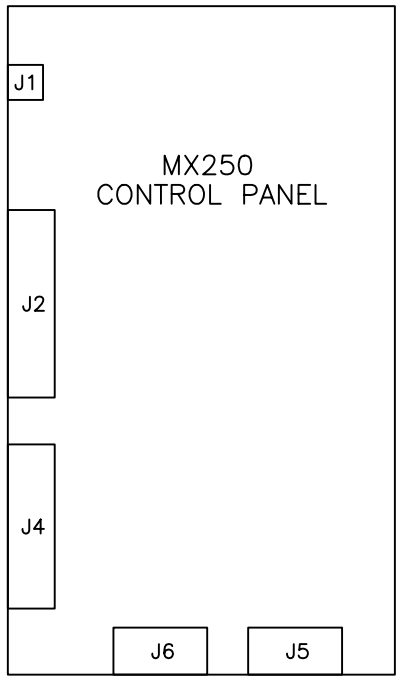

PILOT DEVICES




CONTROLS POWER SUPPLY (CPS)

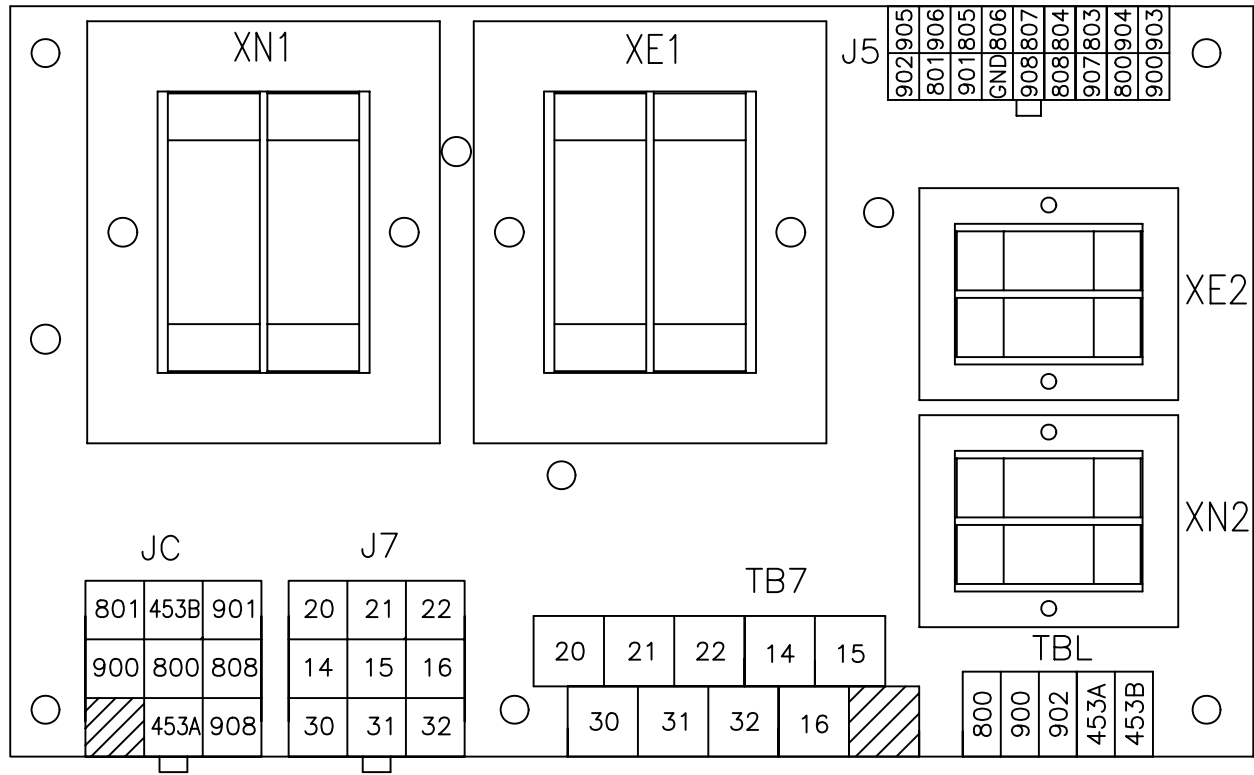


NOTE: J2, J4 TERMINALS FOR ADDED OPTIONAL ACCESSORIES ONLY.

INTERCONNECT PLUGS

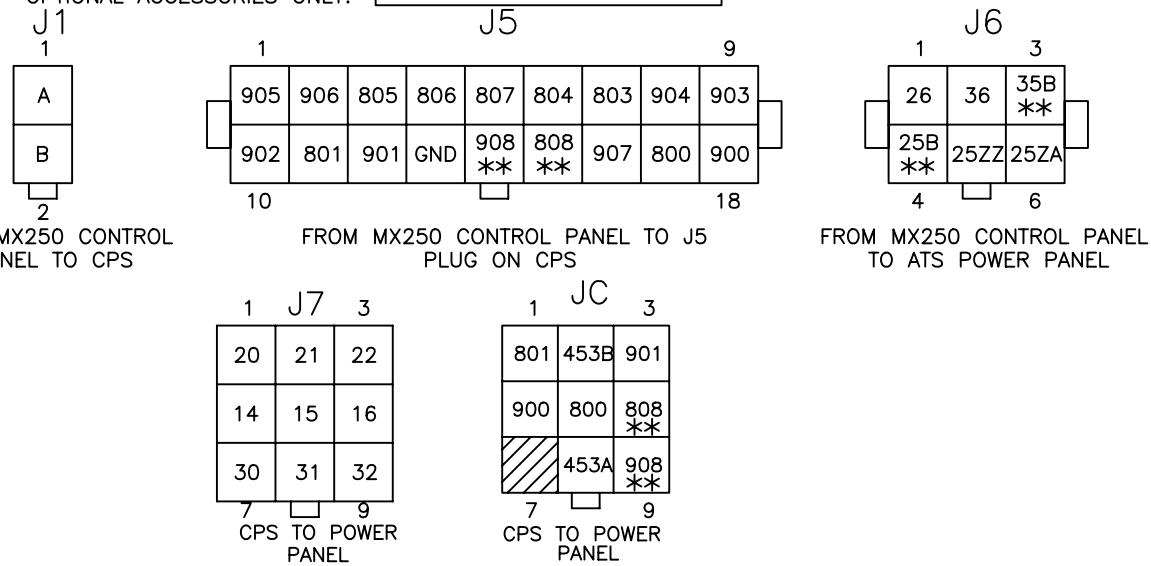

CUSTOMER CONNECTIONS

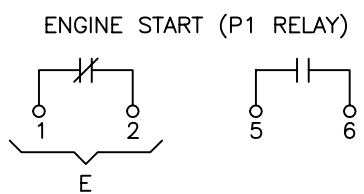

LEGEND

- WIRE CONNECTION
- WIRE ON TERMINAL BLOCK
- * OPTIONAL
- ** DELAY UNIT ONLY

NOTES

FOR BYPASS/ISOLATION TRANSFER SWITCHES CONSULT STANDARD DIAGRAM FOR INTERCONNECTION OF ENGINE START P RELAY WITH TEST PLUG.

RELAY	CONTACT	RATING
P	E	10 AMP @ 240 VAC 10 AMP @ 28 VDC
	A3, A4	15 AMP @ 125, 250 VAC
OUTPUT MODULES	E	10 AMP @ 250 VAC 10 AMP @ 30 VDC

GE PROPRIETARY AND CONFIDENTIAL INFORMATION
This document is the property of General Electric ("GE") and contains proprietary information of GE. This document is loaned on the express condition that neither it nor the information contained therein shall be disclosed to others without the express written consent of GE Industrial Systems, and that the information shall be used by the recipient only as approved expressly by GE Industrial Systems. This document shall be returned to GE upon its request. This document may be subject to certain restrictions under U.S. export controls laws and regulations.

FOR ADDITIONAL INFO REFER TO APPLIED PRACTICES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCES ON:
2 PL. DECIMALS ± .020
3 PL. DECIMALS ± .005
ANGLES ± 1°
FRACTIONS ± 1/64

FINISH ✓

AutoCad Generated

SIGNATURES		DATE
MODEL	GG	05/13/03
DETAIL		
CHECKED		
ENGRG	FS	
MFG		
QUALITY		
ISSUED		
DRAWING FILE:	71a-0501-d-1.dwg	
MODEL / ASSEMBLY FILE:		
# CTQs	CRITICAL TO QUALITY CHARACTERISTIC	

GE Zenith Controls

TITLE: MX250 INSIDE DOOR VIEW

FIRST MADE FOR: ZB4S/ZB4D

SIZE: B CAGE CODE: DWG NO: 71A-0501

SCALE: NA SHEET 1 OF 1

