

(REAR VIEW)

**NOMENCLATURE**

- CCF CONTROL CIRCUIT FUSING
- PFU POWER FUSES
- IL INDICATING LIGHT
- M MOTOR CONTACTOR
- OL THERMAL OVERLOAD RELAY
- PB PUSHBUTTON
- PFR PHASE FAILURE RELAY
- UVR UNDERVOLTAGE RELAY
- \* IF USED
- LO LATE OPENING


USE 75 C CONDUCTORS ONLY FOR FIELD WIRING. TORQUE LINE AND LOAD TERMINALS AS MARKED OR AS SHOWN IN TABLE BELOW.

| SIZE | LINE      | LOAD      |
|------|-----------|-----------|
| 7    | 500 LB-IN | 500 LB-IN |

\*\* CAUTION: FUSES HAVING AN INTERRUPTING RATING NOT LESS THAN THE AVAILABLE SHORT CIRCUIT CURRENT MUST BE INSTALLED IN BOTH SIDES OF THE CONTROL CIRCUIT. 15 AMPERE FUSES ARE RECOMMENDED. THEY MUST NOT EXCEED 30 AMPERE RATING.

NOTE: ADDITIONAL OVER-CURRENT PROTECTION MAY BE REQUIRED. REFER TO THE NATIONAL ELECTRICAL CODE OR LOCAL ELECTRICAL CODE AS REQUIRED.

\* REMOTE DEVICE

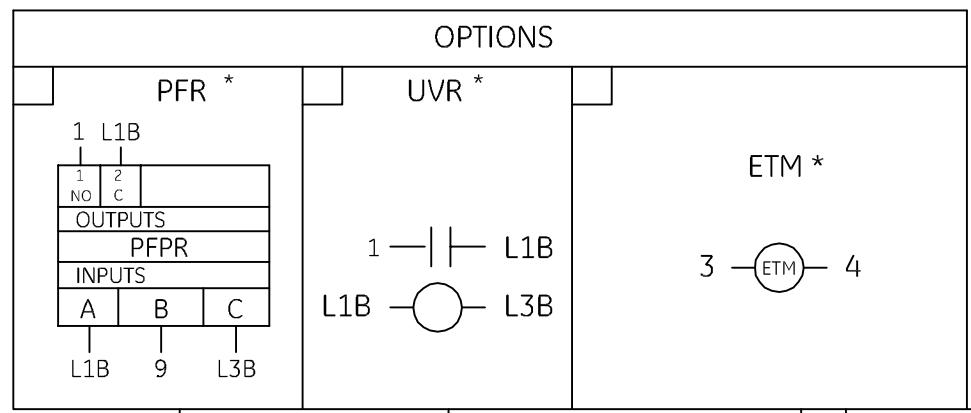

**SELECTOR SWITCH**

| CONTACT | POSITION |     |      |
|---------|----------|-----|------|
|         | AUTO     | OFF | HAND |
| A1      | X        |     |      |
| A2      |          |     | X    |

X-INDICATES CONTACT CLOSED

