




## **Spectra RMS™ SK Frame Molded Case Circuit Breakers**

### **Replacement Line/Load End Lug Cover, Catalog Number SK1LCK (ref. 252B1660G1)**

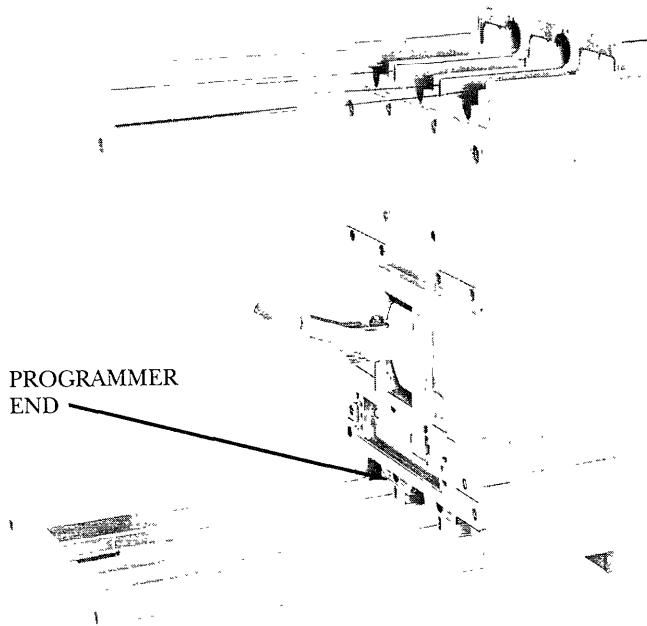

All Spectra RMS™ circuit breakers are suitable for reverse feed, and have no line or load markings. Incoming power cables or bus bars may be connected to either the upper or lower terminals as dictated by the application.

For SKH, SKL, & SKD use lug cover on either end.

For SKP frame use lug cover on lower (load) end only.

**NOTE:** For upper (line) end of SKP frame, use lug cover part number SKPSHLD.

Assemble cables to lugs (reference Table 3 in circuit breaker installation instruction GEH-5592 for proper cable insulation strip lengths and terminal torques). Connect all cables to circuit breaker, making sure that the stripped end of each cable is fully seated in the lug. If bus bar connections are used instead of lugs, torque them to 400 in-lbs.

For ease of assembly, fasten lugs first. Then install lug cover with (2) captive metric M5 screws provided.

**NOTE:** Use alternate screws (provided) on Spectra RMS™ "SK" frame breakers with date code J204= and before.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the GE Company.



**GE Electrical Distribution & Control**