


MULTIPLES OF AMPERE SETTING (CONTINUOUS)

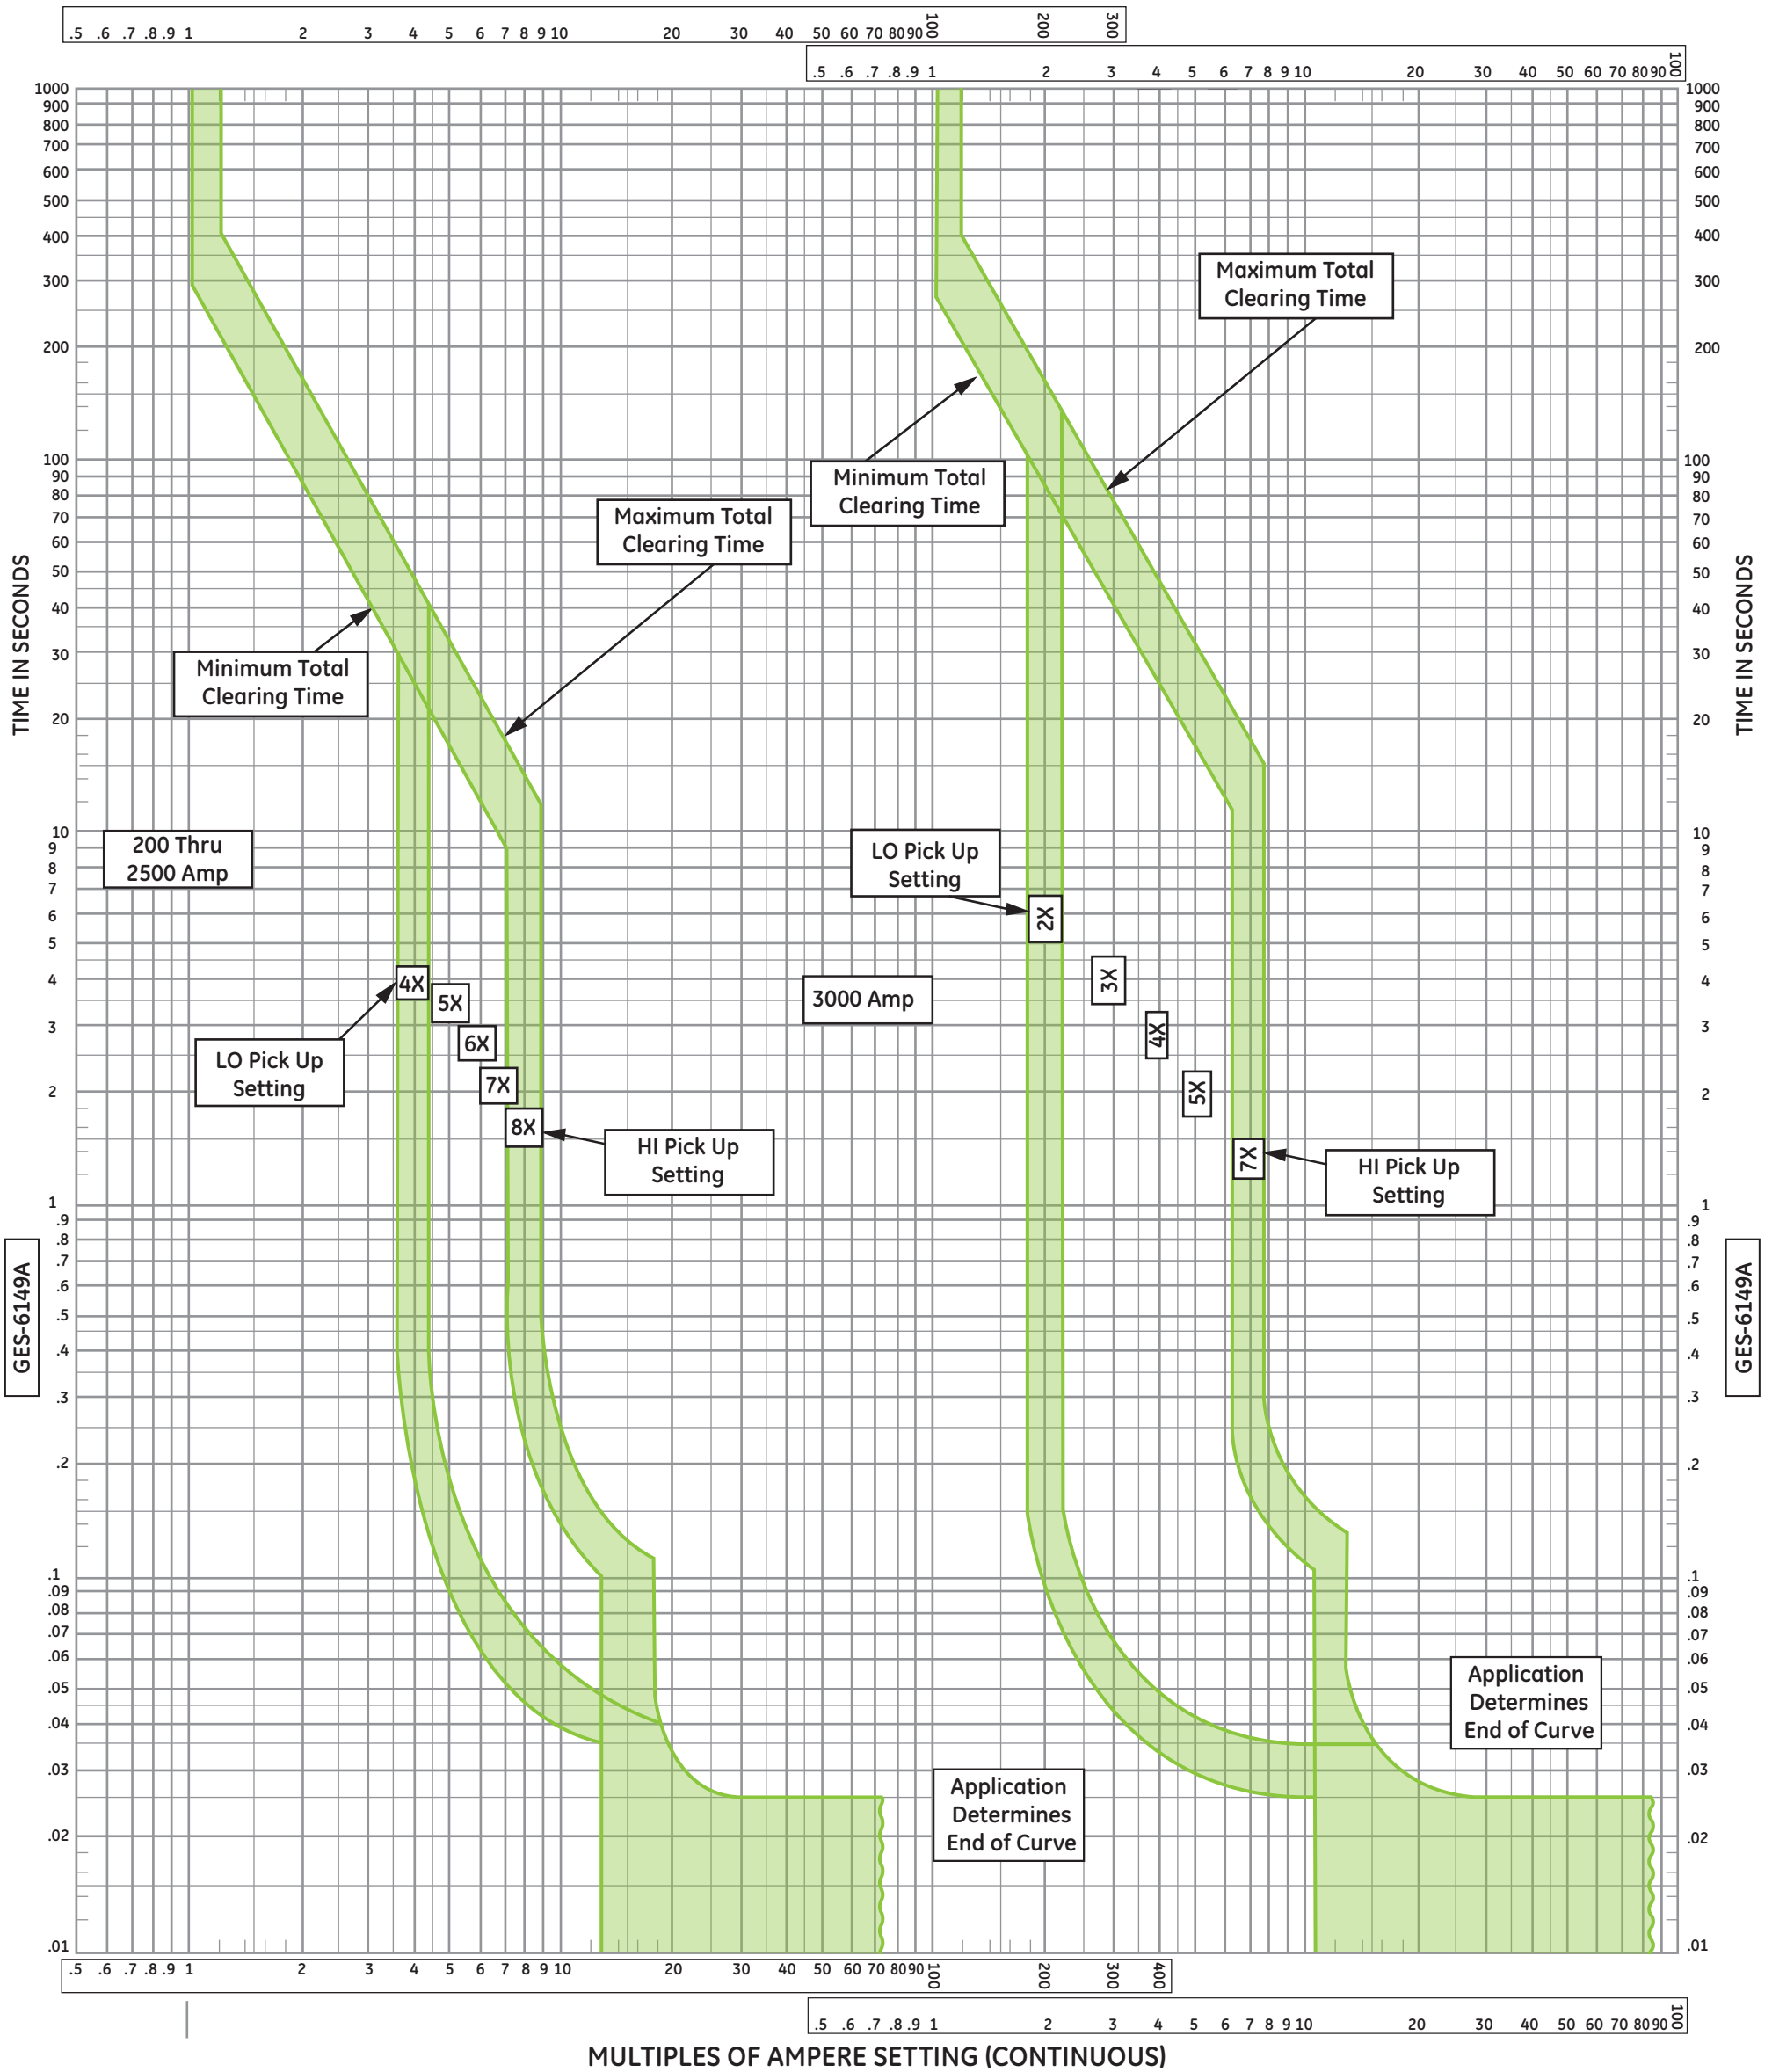

GE Consumer & Industrial -  
Electrical Distribution

**Sensor Ratings (Amperes)**

200, 400, 600, 800, 1000, 1200, 1600,  
2000, 2500 and 3000 Amperes

**Voltage Rating**

600 Vac

**Frequency Rating**

50/60 Hertz

**Insulated Case Circuit Breaker  
PowerBreak® with SelecTrip™**

Types TPR, THR, TPRR, THRR

Long-time, Short-time and  
Instantaneous Time-current Curves

Curves apply at 50/60 Hertz and from  
-20°C to 55°C ambient.

**GES-6149A**


**Adjustments**

Long-time-delay Unit: Continuous current settings are  
50, 60, 70, 80, 90 and 100% of sensor rating.

Magnetic-delay Unit: Pick-up current settings are 4x,  
5x, 6x, 7x and 8x multiples of long-time unit setting  
thru 2500 amperes, and 2x, 3x, 4x, 5x and 7x for 3000  
amperes.

Instantaneous Over-ride: set at 15x sensor ampere  
rating. For sensor ratings thru 2500 amperes, and 12x  
for 3000 amperes.

MULTIPLES OF AMPERE SETTING (CONTINUOUS)

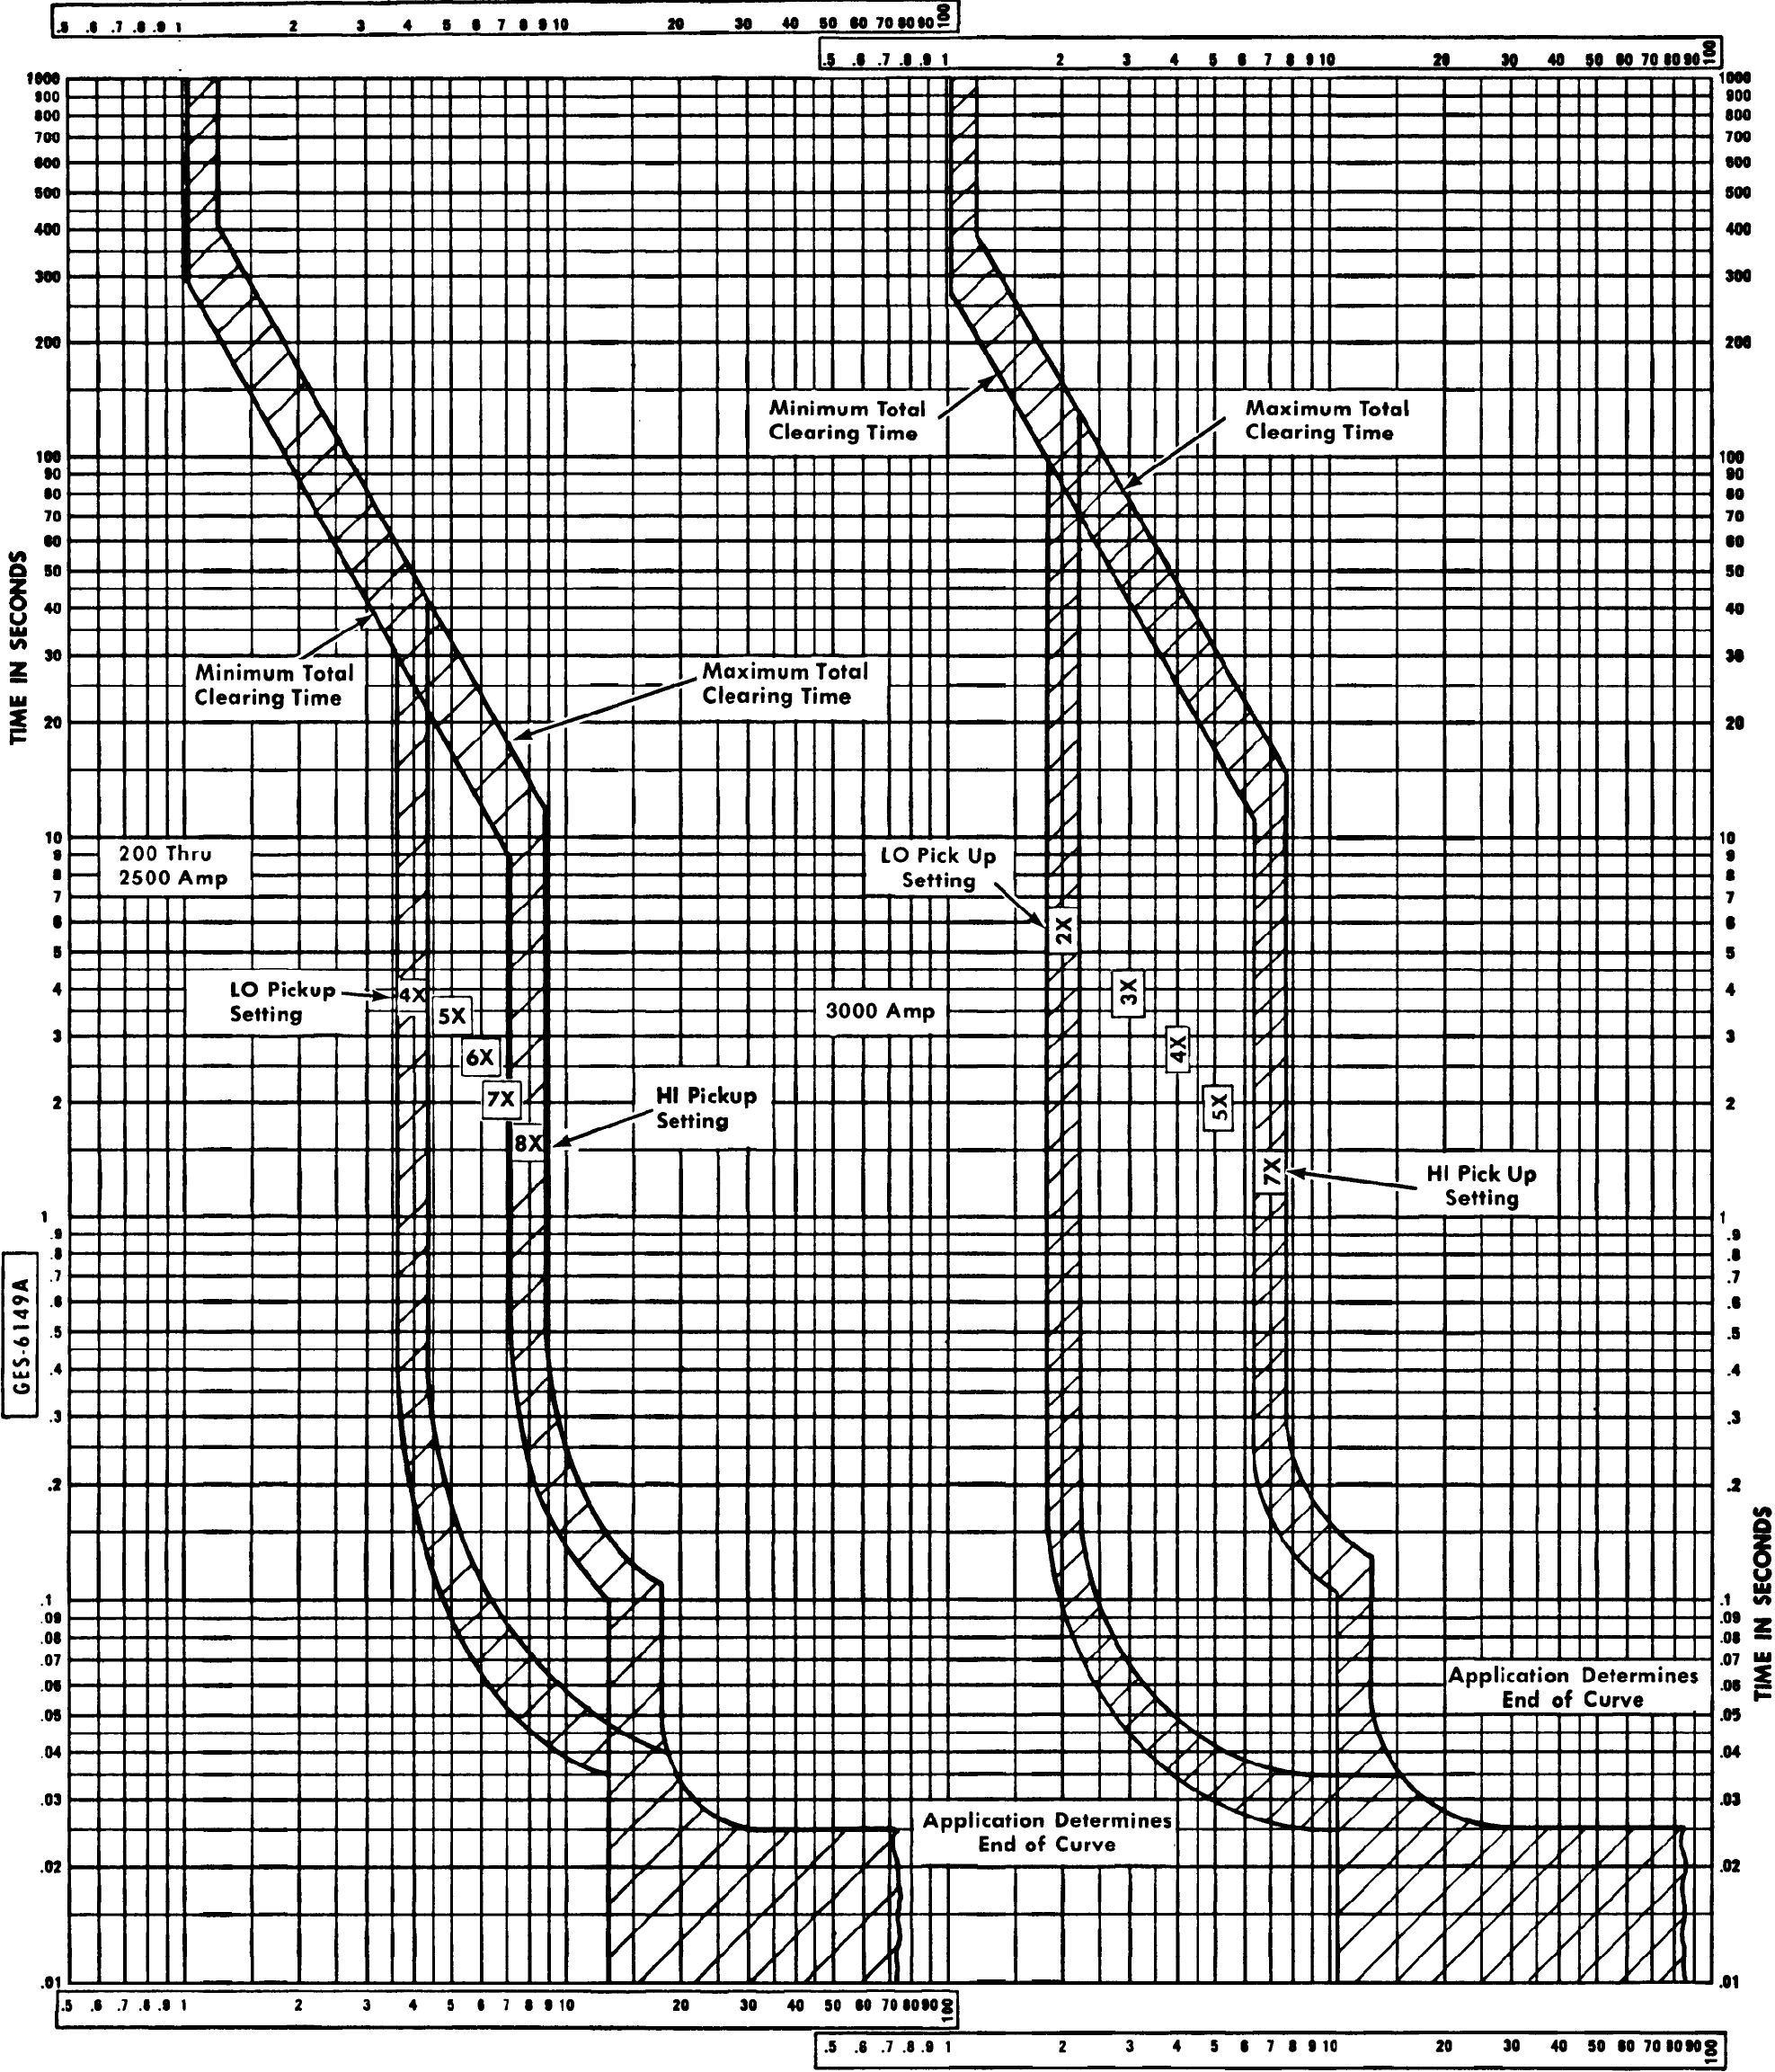

MULTIPLES OF AMPERE SETTING (CONTINUOUS)

<p><b>GENERAL ELECTRIC</b></p> <p>Sensor Rating (Amperes) 200, 400, 600, 800, 1000, 1200 1600, 2000, 2500, 3000 amperes</p> <p>Voltage Rating 600 volts ac</p> <p>Frequency Rating 50/60 Hertz</p>	<p>INSULATED-CASE CIRCUIT BREAKER</p> <p><b>POWER BREAK</b>®</p> <p><b>With SelectTrip</b>™</p> <p>Types TPR, THR, TPRR, THRR</p> <p>Long-time, Short-time and Instantaneous Time-current Curves</p> <p>(Curves apply at 50/60 Hertz and from -20 C to +55 C ambient)</p>	<p><b>GES-6149A</b></p> <p>Adjustments</p> <p>Long-time-delay Unit: Continuous current settings are 50, 60, 70, 80, 90 and 100% of sensor rating.</p> <p>Magnetic-delay Unit: Pick-up current settings are 4x, 5x, 6x, 7x, and 8x multiples of long-time unit setting thru 2500 amperes, and 2x, 3x, 4x, 5x and 7x for 3000 amperes.</p> <p>Instantaneous Over-ride: Set at 15x sensor ampere rating. For sensor ratings thru 2500 amperes, and 12x for 3000 amperes.</p>
--	---	---