


MULTIPLES OF GROUND FAULT PICKUP SETTING



MULTIPLES OF GROUND FAULT PICKUP SETTING

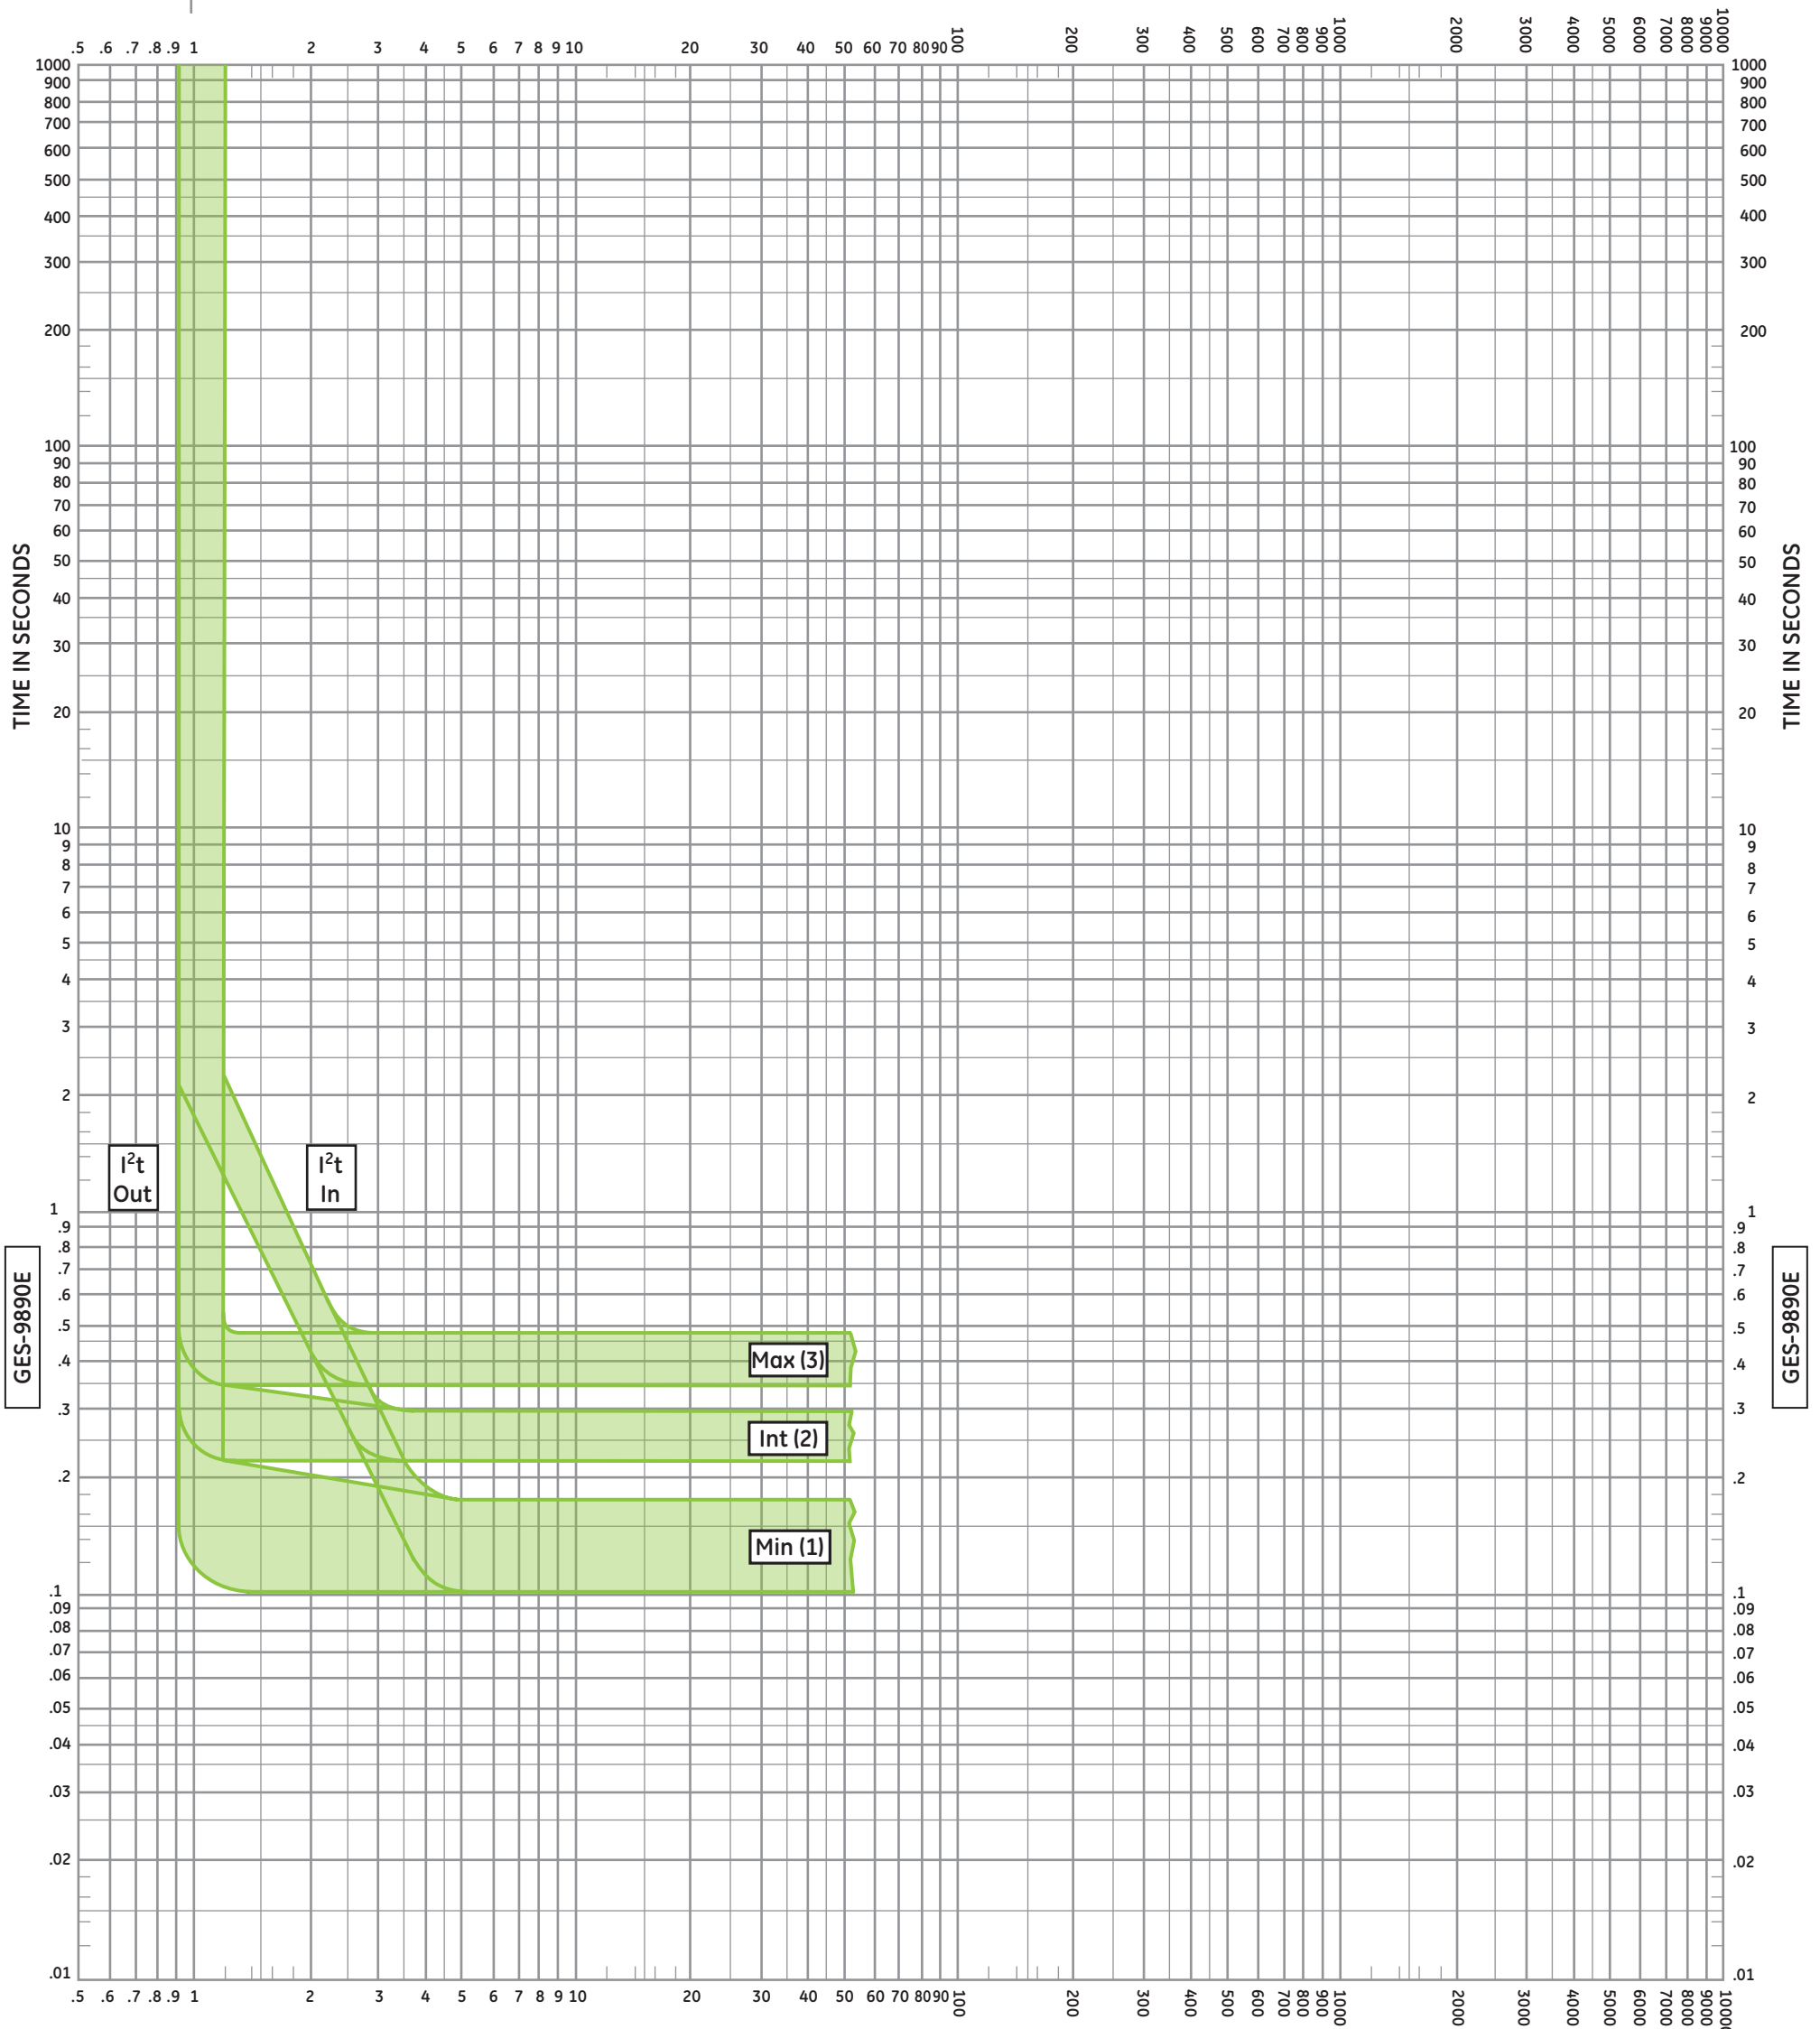

GE Consumer & Industrial -
Electrical Distribution

Available Ratings (Amperes)

Frame	Current Sensor (S)
800	200, 400, 800
1600	800, 1000, 1600
2000	2000
2500	1000, 2000, 2500
3000	3000
4000	4000

Voltage Rating: 600 Vac, maximum

Insulated Case Circuit Breakers
Power Break™ II

Types SS, SH
with Power+™, MicroVersaTrip Plus® or
MicroVersaTrip® PM
Digital RMS Trip Units

Ground Fault Time-Current Curves

Curves apply at 50 to 60 Hertz
and from -20°C to +70°C breaker ambient.

GES-9890E

Adjustments

Ground Fault Function:

*Pickup settings are in multiples of Current Sensor Rating (S)

For (S) = 150 through 2000 amps

Pick-up setting: 0.20 to 0.60

For (S) = 2500 through 3000 amps

Pick-up setting: 0.20 to 0.37

For (S) = 4000 amps

Pick-up setting: 0.20 to 0.30

Delay Bands: Min (1), Int (2), Max (3); I²t In/Out

Settings Glossary

S = Current Sensor Rating in amps