Transformer

by ABB

1M0000000

Catalog Number **Type QL**

9T10A1004

75.0 KVA 60 HZ 3 PH 4.5 % IMP

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

JUMPER CONNECTION TAP	VOLTS
1	502
2	491
3	480
4	469
5	455
6	444
7	433

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 208 VOLTS (LINE-LINE)
120 VOLTS (LINE-NEUTRAL)

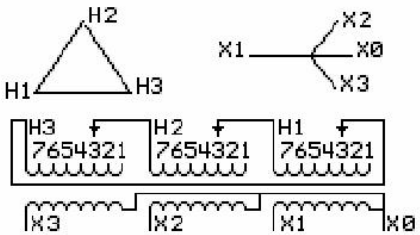

COIL TAP ARRANGEMENT

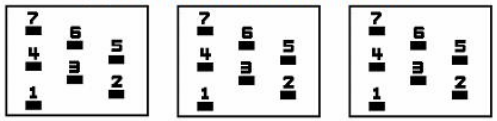

NET WGT
515 LB
233.6 Kg
90721
UY14A

INSPECTION & FINAL TEST
NOG
N227!
070122

Energy Verified
EV519886

LISTED 769G

X3	H3	X2	H2	X1	H1	-
-	-	-	-	-	-	X0
-	-	-	-	-	-	H1
-	-	-	-	-	-	X1
-	-	-	-	-	-	H2
-	-	-	-	-	-	X2
-	-	-	-	-	-	H3
-	-	-	-	-	-	X3

2M0000000

3M0000000

ENCLOSURE TYPE 2 (IP20). OR RAINPROOF TYPE 3R (IP22) WHEN PROVIDED SHIELD 9T18Y1074G06

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001

ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODE

ASSEMBLED IN MEXICO

X3	H3	X2	H2	X1	H1 -
-	-	-	-	-	-

Note: X0 at bottom

Outline: 303B111GEUYP14A

NEMA CLASS AA DRY TYPE TRANSFORMER

Meets DOE 2016 efficiency