



# Transformer

by ABB





\*1M000000\*

**Catalog Number**      **Type QL**  
**9T10A1006G03**

150.0 KVA    60 HZ    3 PH    4.5 % IMP  
40 C AMB.    150 C RISE    220 C SYSTEM    IS-19C

PRIMARY (H)      480 VOLTS (LINE-LINE)  
SECONDARY (X)    208 VOLTS (LINE-LINE)  
                                 120 VOLTS (LINE-NEUTRAL)

JUMPER CONNECTION	
TAP	VOLTS
1-2	503
2-3	492
3-4	480
4-5	469
5-6	457
6-7	446
7-8	435

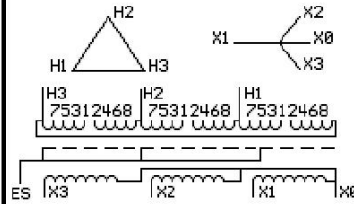

NET WGT      INSPECTION & FINAL TEST  
1030 LB      TEST  
467.2 Kg      NOG  
89059      N137!  
DY76A      091021



ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP20). OR RAINPROOF TYPE 3R (IP22) WHEN PROVIDED SHIELD 9T18Y1076G06

ASSEMBLED IN MEXICO

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001  
ALUMINUM CONDUCTOR    PRIMARY: 10 KV BIL      SECONDARY: 10 KV BIL  
IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION.  
CHECK ADDITIONAL NEC AND LOCAL CODE

X3 - X2 - X1 - -  
- H3 - H2 - H1  
Note: X0 at the bottom

Outline: 303B111GEDYP76A

NEMA CLASS AA DRY TYPE TRANSFORMER

Meets DOE 2016 efficiency

X3 - X2 - X1 - - H1  
X3 - X2 - X1 - - H1  
X3 - X2 - X1 - - H1  
X3 - X2 - X1 - - H1  
X3 - X2 - X1 - - H1  
X3 - X2 - X1 - - H1