Core & Coil Transformer

1M0000000

Catalog Number Type QL-C

9T10B1003

45.0 KVA 60 HZ 3 PH 3.2 % IMP

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

Note: Design is based on 45.00KVA & 115C Rise 3% Imp.

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 208 VOLTS (LINE-LINE)
120 VOLTS (LINE-NEUTRAL)

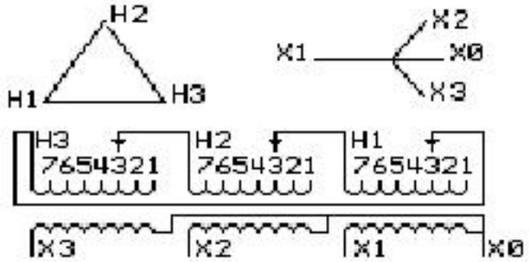

COIL TAP ARRANGEMENT

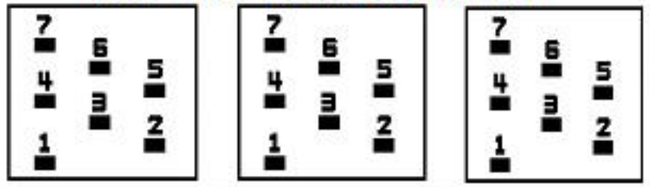

JUMPER CONNECTION

TAP	VOLTS
1	504
2	490
3	480
4	467
5	457
6	444
7	434

NET WGT
390 LB
176.9 Kg

53549
UX73A
NOG
021516

INSPECTION & FINAL TEST
N608!

Assembled in Mexico

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

Outline:
303B111GEUXP73A

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODE

X3	H3	X2	H2	X1	H1	X0
-	-	-	-	-	-	

Note: standard

GE Energy Industrial Solutions NEMA CLASS AA DRY TYPE TRANSFORMER Meets DOE 2016 efficiency

X0 H1 X1 H2 X2 H3 X3
- - - - - - -

2M0000000

X0 H1 X1 H2 X2 H3 X3
- - - - - - -

3M0000000