Transformer

1M0000000

Catalog Number Type QL

9T10C1006G33

150.0 KVA 60 HZ 3 PH 5.3 % IMP

40 C AMB. 115 C RISE 220 C SYSTEM IS-19C

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 208 VOLTS (LINE-LINE)
120 VOLTS (LINE-NEUTRAL)

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

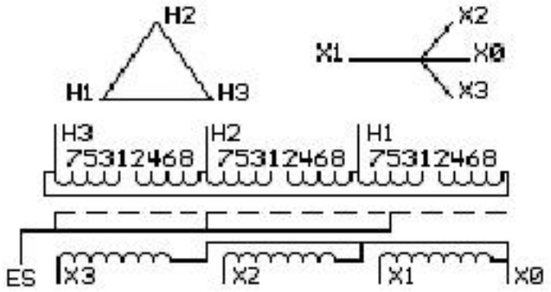

COIL TAP ARRANGEMENT

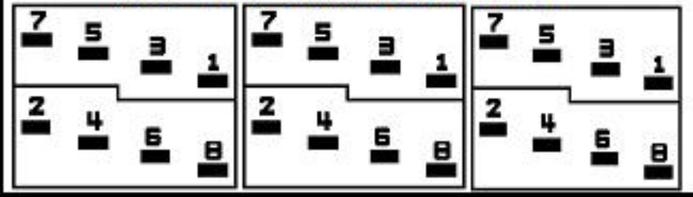

JUMPER CONNECTION

TAP	VOLTS
1-2	506
2-3	493
3-4	480
4-5	468
5-6	455
6-7	442
7-8	430

NET WGT
1240 LB
562.5 Kg

60418
DX76C
NOG
021916

INSPECTION & FINAL TEST
N608!

ENCLOSURE TYPE 2 (IP20). OR RAINPROOF TYPE 3R (IP22) WHEN PROVIDED SHIELD 9T18Y1076G06

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
COPPER CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

Outline:
303B111GEDXP76C

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODE

Assembled in Mexico

X3 - X2 - X1 - -
- H3 - H2 - H1

Note: X0 at the bottom

- X1 - H1 - X0
X2 - H2 - X1 - H1
X3 - H3 - X2 - H2 - H3

2M0000000

3M0000000

GE Energy Industrial Solutions NEMA CLASS AA DRY TYPE TRANSFORMER Meets DOE 2016 efficiency