Transformer

by ABB

1M0000000

Catalog Number **Type QL**

9T10C1354

75.0 KVA 60 HZ 3 PH 4.2 % IMP

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

JUMPER CONNECTION TAP	VOLTS
1	219
2	214
3	208
4	204
5	199
6	194
7	189

PRIMARY (X) 208 VOLTS (LINE-LINE)
SECONDARY (H) 380 VOLTS (LINE-LINE)
219 VOLTS (LINE-NEUTRAL)



COIL TAP ARRANGEMENT



NET WGT 748 LB 339.3 Kg
89739
UX74C

INSPECTION & FINAL TEST
NOG
N139!
092021

Energy Verified
EV519886

LISTED 769G

ENCLOSURE TYPE 2 (IP20). OR RAINPROOF TYPE 3R (IP22) WHEN PROVIDED SHIELD 9T18Y1074G06

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001

COPPER CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODE

ASSEMBLED IN MEXICO

H3	X3	H2	X2	H1	X1
-	-	-	-	-	-

Note: **H0 at the bottom**

Outline: 303B111GEUXP74C

NEMA CLASS AA DRY TYPE TRANSFORMER
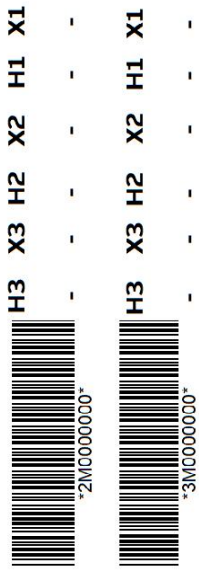
Meets DOE 2016 efficiency