Transformer

1M0000000

Catalog Number Type QL

9T10Z1002G31

30.0 KVA 60 HZ 3 PH 3.6 % IMP

40 C AMB. 115 C RISE 220 C SYSTEM IS-19C

Note: Design is based on 30.00KVA & 115C Rise 3.6% Imp.

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 208 VOLTS (LINE-LINE)
120 VOLTS (LINE-NEUTRAL)

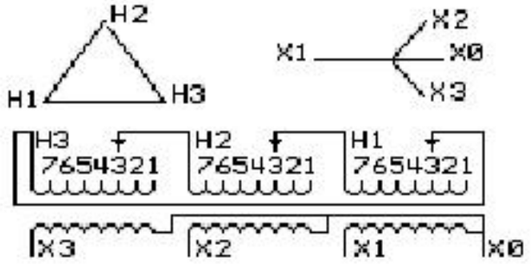

COIL TAP ARRANGEMENT

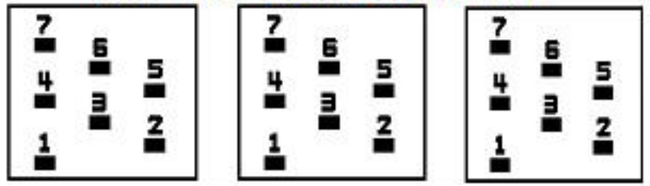

JUMPER CONNECTION TAP	VOLTS
1	503
2	493
3	480
4	468
5	455
6	445
7	432

NET WGT
353 LB
160.1 Kg

53630
UX72C
NOG
032816

INSPECTION & FINAL TEST
N614!

LISTED 769G

ENCLOSURE TYPE 2 (IP20). OR RAINPROOF TYPE 3R (IP22) WHEN PROVIDED SHIELD 9T18Y1172G06

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
COPPER CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

Outline:
303B111GEUXP72C

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODE

Assembled in Mexico

X3	H3	X2	H2	X1	H1	X0
-	-	-	-	-	-	

Note: standard

GE Energy Industrial Solutions NEMA CLASS AA DRY TYPE TRANSFORMER Meets DOE 2016 efficiency

X0 H1 X1 H2 X2 H3 X3
- - - - - - -

2M0000000

X0 H1 X1 H2 X2 H3 X3
- - - - - - -

3M0000000