



# Transformer

by ABB




\*1M00044YN\*


Catalog Number **9T33A2673** Type QL

50.0 KVA 60 HZ 1 PH 5.4 % IMP  
 40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

PRIMARY LINES ON H1-H2		SECONDARY LINES ON X1-X4	
VOLTS	CONNECT	VOLTS	CONNECT
215	8-H1,7-H2	429	8-7
227	6-H1,5-H2	442	7-6
240	4-H1,3-H2	455	6-5
253	2-H1,1-H2	467	5-4
		480	4-3
		493	3-2
		120/240	X2-X3



### COIL TAP ARRANGEMENT



NET WGT 490 LB  
 222.3 Kg  
 85659  
 XV173

NP1 1203202  
 INSPECTION &  
 FINAL TEST  
 N934!



X4 - H1  
 X2 - H2  
 X1 - H1  
 X3 - H2

ENCLOSURE TYPE 2 (IP20). RAINPROOF TYPE 3R ENCLOSURE (IP22) WHEN PROVIDED SHIELD 9T18Y1071G06

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001  
 ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL  
**IN ACCORDANCE WITH NEC SECTION 450-9. ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.**

ASSEMBLED IN MEXICO

X3 X1 - X2 X4 -  
 - - H2 - - H1

Note: Standard

Outline: 303B409CAP073

NEMA CLASS AA DRY TYPE TRANSFORMER

Energy Efficiency in accordance with CSA C802.2-18 and DOE 2016



\*2M00044YN\*



\*3M00044YN\*



# TRANSFORMATEUR

by ABB



\*1M00044YN\*

No. Catalogue **9T33A2673** Type QL


50.0 KVA 60 HZ 1 PH 5.4 % IMP

40 C AMB. 150 ÉLÉV. TEMP. 220 CLASS D'ISOL. IS-19C


PRIMARY		SECONDARY		
LINES ON H1-H2		LINES ON X1-X4		
VOLTS	CONNECT	VOLTS	CONNECT	
215	8-H1,7-H2	429	8-7	
227	6-H1,5-H2	442	7-6	
240	4-H1,3-H2	455	6-5	
253	2-H1,1-H2	467	5-4	
		480	4-3	
	493	3-2	SECONDARY	
	505	2-1	120/240	X2-X3



### ENSEMBLE DE PRISE D'ENROULEMENT



POIDS NET 490 LB 222.3 Kg  
NP1 1203202  
INSPECTION & ESSAIS FINAUX  
XV173 N934!

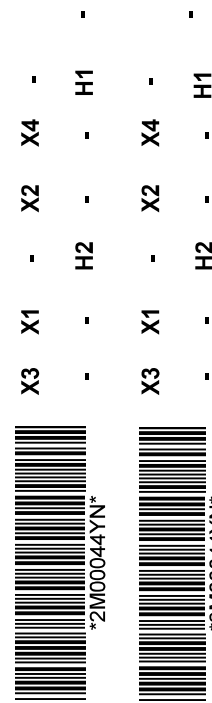

BOÎTIER TYPE 2(IP20) À L'ÉPREUVE DES ÉGOUTTEMENTS. BOÎTIER TYPE 3R (IP22). À L'ÉPREUVE DES INTEMPÉRIES LORSQUE FOURNI AVEC ÉCRAN 9T18Y1071G06

VOIR INSTRUCTION 475A667AAP001 AVANT LA MANIPULATION, L'INSTALLATION OU L'OPÉRATION


ALUMINUM CONDUCTEUR PRIMAIRE: 10 KV BIL SECONDAIRE: 10 KV BIL

**LAISSER UNE ESPACE DE 6 POUCES POUR ASSURER UNE VENTILATION ADÉQUATE. VÉRIFIER LES CONSIGNES DU CODE ÉLECTRIQUE CANADIEN OU AUTRES CODES.**

TRANSFORMATEUR À SEC NEMA CLASSE AA

Conforme au rendement DOE 2016

### ASSEMBLÉ AU MEXIQUE



Note: Standard

Schéma: 303B409CAP073

Conforme au CSA C802.2-18