Transformer

1M0000000

Catalog Number Type QL

9Q3A015AFAD13A2T00

9T61B3801G03

15.0 KVA 60 HZ 3 PH 5.7 % IMP

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

Note: Design is based on 15.00KVA & 150C Rise 5.7% Imp.

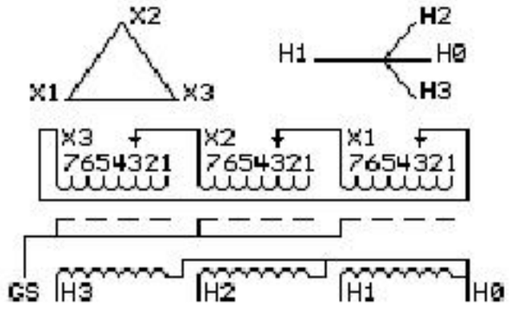

JUMPER CONNECTION	
TAP	VOLTS
1	219
2	213
3	208
4	203
5	197
6	192
7	188

NET WGT
240 LB
108.9 Kg

54451
XV371
NOG
071615

INSPECTION & FINAL TEST
N529!

PRIMARY (X) 208 VOLTS (LINE-LINE)
SECONDARY (H) 480 VOLTS (LINE-LINE)
277 VOLTS (LINE-NEUTRAL)

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

COIL TAP ARRANGEMENT

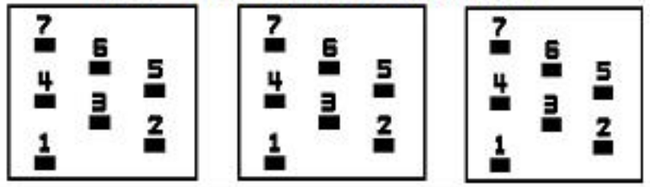

LISTED 769G

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G11

SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED 13

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001 Outline: 303B401AAP071

ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

Assembled in Mexico

H3 - H2 - H1 - -

- X3 - X2 - X1

Note:

- H3 - H2 - H1 - X1 - X2 - X3 - H0

2M0000000

3M0000000

GE Energy Industrial Solutions NEMA CLASS AA DRY TYPE TRANSFORMER Meets TP-1 2002 efficiency