Transformer

1M0000000

Catalog Number

TYPE QL

9T83W3804G80

75.0 KVA 60 HZ 3 PH 3.9 % IMP

40 C AMB. 80 C RISE 220 C SYSTEM IS-19C

Note: Design is based on 112.5KVA & 150C Rise 5.4% Imp.

PRIMARY (X) 208 VOLTS (LINE-LINE)
SECONDARY (H) 480 VOLTS (LINE-LINE)
277 VOLTS (LINE-NEUTRAL)

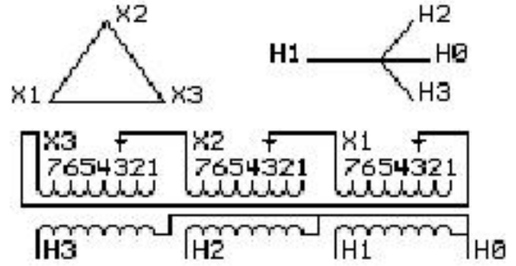

COIL TAP ARRANGEMENT

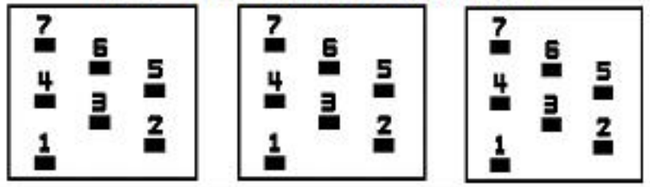

JUMPER CONNECTION TAP	VOLTS
1	218
2	213
3	208
4	203
5	198
6	193
7	188

NET WGT
765 LB
347.0 Kg
9T40G0007
55074
XV375
NOG
072115

INSPECTION & FINAL TEST
N530!

LISTED 769G

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18W4317G06

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001 Outline: 303B401MWP075

ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

Assembled in Mexico

H3 - H2 - H1 - -

- X3 - X2 - X1

Note: H0 Terminal at the bottom

H3 - H2 - H1 - - X3 - X2 - X1 H0

H3 - H2 - H1 - - X3 - X2 - X1

2M0000000

3M0000000

Midwest Electric Products NEMA CLASS AA DRY TYPE TRANSFORMER Meets TP-1 2002 efficiency