


Temp.
0 25 40 60



Shift index for long-time delay only.

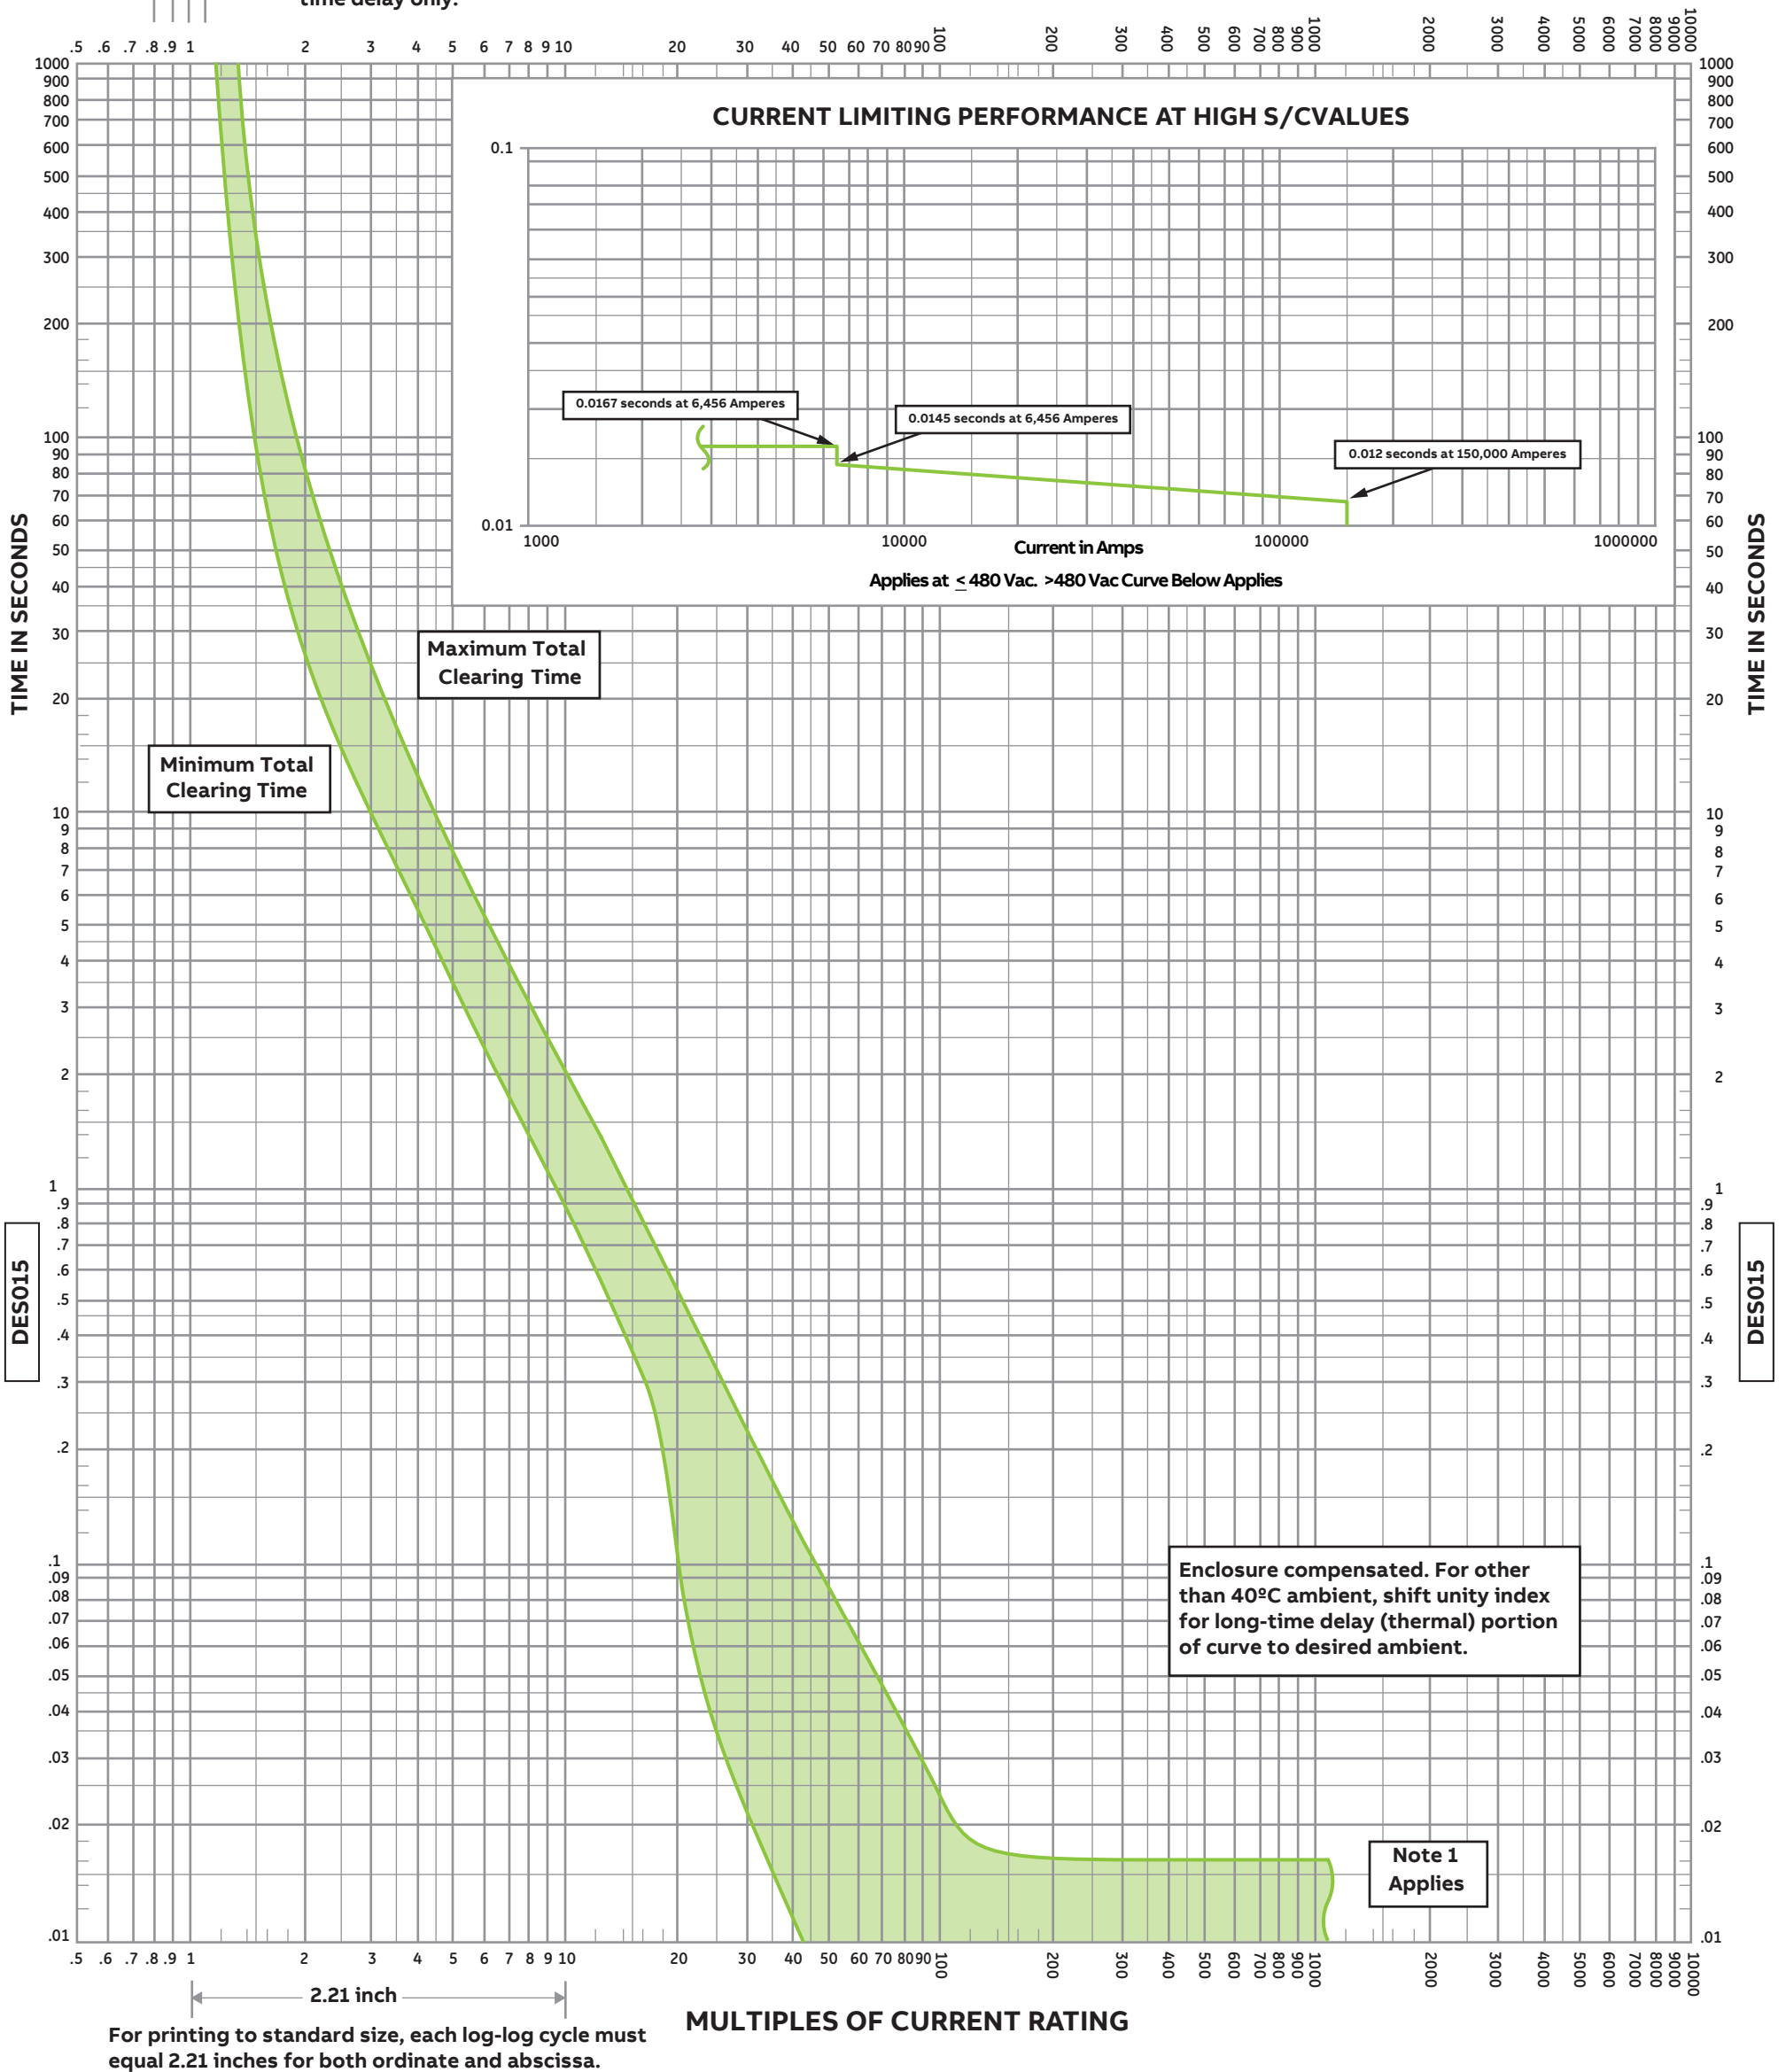

2.21 inch

For printing to standard size, each log-log cycle must equal 2.21 inches for both ordinate and abscissa.

MULTIPLES OF CURRENT RATING



Industrial Solutions

Molded Case Circuit Breaker with Thermal-Magnetic Trip Unit

Record Plus™ Types FC & FB
Long Time Delay and Instantaneous Time-Current Curves
Enclosure-Compensated

Curves show enclosure-compensated circuit breaker in open air, 40°C ambient, wired with conductors of corresponding rating, no prior load. For all other ambients, use rating shift index at top of sheet.

DES015

Adjustments

Long-time delay thermal trip: not adjustable.
Instantaneous magnetic trip: not adjustable.

Note 1: Current limiting range, please refer to inset curve.

