

# GP100 Rectifier For Edge Power Architecture

## Advanced Technology to Simplify Your Network



The ABB GP100 rectifier for Edge Power Architecture is a true three-phase rectifier. The rectifier efficiently transforms energy from any standard three-phase source into the 48-volt DC power needed for modern data center architectures. The rectifier operates using any three-phase input voltage from 320 V<sub>AC</sub> to 530 V<sub>AC</sub> without need for a neutral conductor. This means that one single rectifier can be used globally to meet all your at scale 48-volt powering needs.

The GP100 efficiency is market leading for diode protected, true hot pluggable, three-phase 48-volt rectifiers.

The GP100 rectifier for Edge offers a powerful combination of efficiency, data center architecture simplicity and reliability.

### A True System Solution

- GP100 rectifiers are part of the proven Global Platform Line of rectifier products designed to meet the demanding needs of data center and wireless and telecommunications customers.
- Monitoring/Control – the built in microprocessor controls and monitors all critical rectifier functions and communicates with the system controller using the built in Galaxy Protocol serial interface.
- Designed and tested with in rack battery modules to support a safe, reliable and low cost way to provide five nines data center reliability.

### Features & Advantages

- Compact – 1RU form factor provides high power density 27 Watts/cubic inch.
- Efficient – Flat efficiency curve maintains 96% efficiency over a wide range of loads.
- Flexible Output – Provides up to 125 Amps of 48-volt power for fast charging of discharged batteries.
- Programmable – Output is programmable between 42 and 58 V<sub>DC</sub> to support traditional lead-acid and advanced battery chemistries.
- Wide Range Input – Operates at any three-phase AC voltage from 320 to 530 V<sub>AC</sub>.
- Temperature Hardened – Operates -40°C to 70°C
- Fail-Safe Performance – hot insertion capabilities allow for rectifier replacement without system shutdown; soft start and inrush current protection prevent nuisance tripping of upstream breakers.
- Extended Service Life – parallel operation with automatic load sharing ensures that load is distributed across all units.
- Plug and Play – installation of the rectifier in a shelf connected to a system controller initializes all set up parameters, automatically.




# Electrical Specifications for System Design

## Environmental, Compliance & Physical

Operating Ambient Temperature Range	-40°C to +70°C (Output de-rates at 2%/°C beginning at 55°C)
Cooling Method	Front to back airflow with onboard temperature controlled fans
Operating Relative Humidity	0 - 95% (non-condensing) for use in a controlled environment
Electromagnetic Compatibility	FCC Part 15, EN 55032 (CISPR32), EN 55035 (CISPR 35), Level A, GR-1089
Lightning Surge	EN/IEC 61000-4-5 Level 4 (Error free), ANSI C62.41 Category B 100 kHz ring and 1.2/50µs combination waves (6kV damage free)
Agency Certifications	UL/CSA/EN62368-1, NEBS GR-1089, GR-63-CORE
Heat Release	217 Watts, or 740 BTU/hr at full load of 6000 Watts
Mean Time Between Failure (MTBF); Life	300k Hours @ 25°C per Telcordia SR-332, Method 1, Case 3; 10 Years
Height x Width x Depth, Weight, Packaged weight	1.6x8x17.9in (41x236x455mm), 8.95 lbs (4.1 kg), 9.85 lbs (4.5 kg)

## Input Voltage and Power

Response to AC input voltage	Provides full power between 320 V <sub>ac</sub> and 530 V <sub>ac</sub> three-phase.
Ac input current	10A max @380 V <sub>ac</sub> three-phase; 8A @480 V <sub>ac</sub> three-phase
Power Factor	0.96-0.995@loads over 50%
THD	< 6% @loads over 70% Typical
Holdover	12 milliseconds, with V <sub>out</sub> final >40 V
Frequency	47 to 66Hz

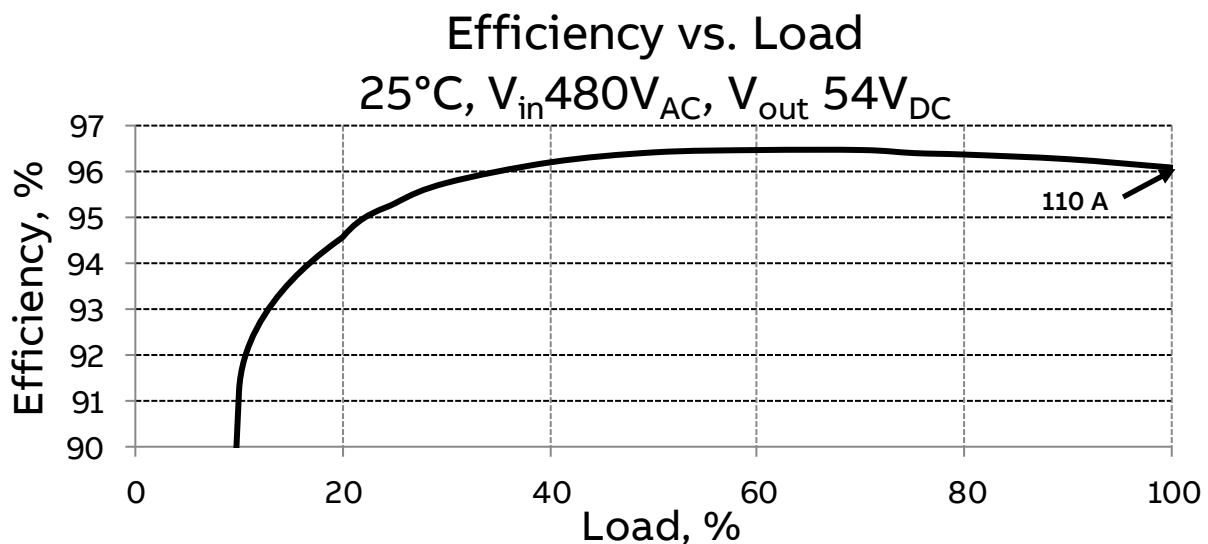




# Electrical Specifications for System Design


## Output

$V_{out}$	42–58 V <sub>DC</sub> range. Default = 52 V <sub>DC</sub>
$I_{out}$	110A @ 54.5 V <sub>DC</sub> output 125A @ 48 V <sub>DC</sub> output
Regulation	± 1% w/controller
Ripple	100 mV <sub>rms</sub> , 250 mV <sub>p-p</sub>
Efficiency	96.5% Peak
Soft Start	Starts up into fully discharged batteries.

**Current Limit Profile, Typical**  
480 V<sub>AC</sub> Input, 60Hz @25°C

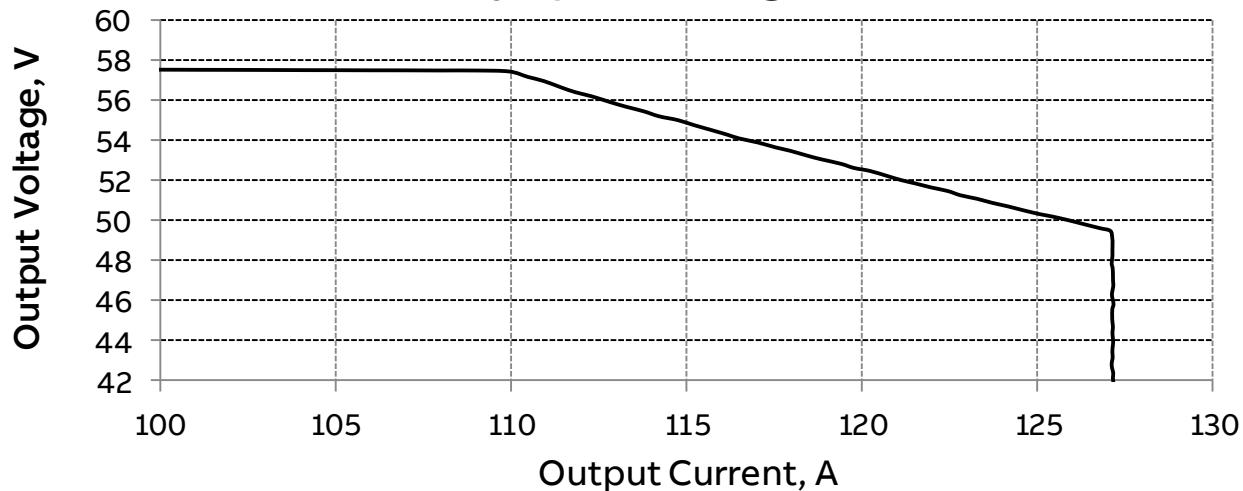

**Output Power vs. Temperature**  
480 V<sub>AC</sub> Input, 54 V<sub>DC</sub> Output

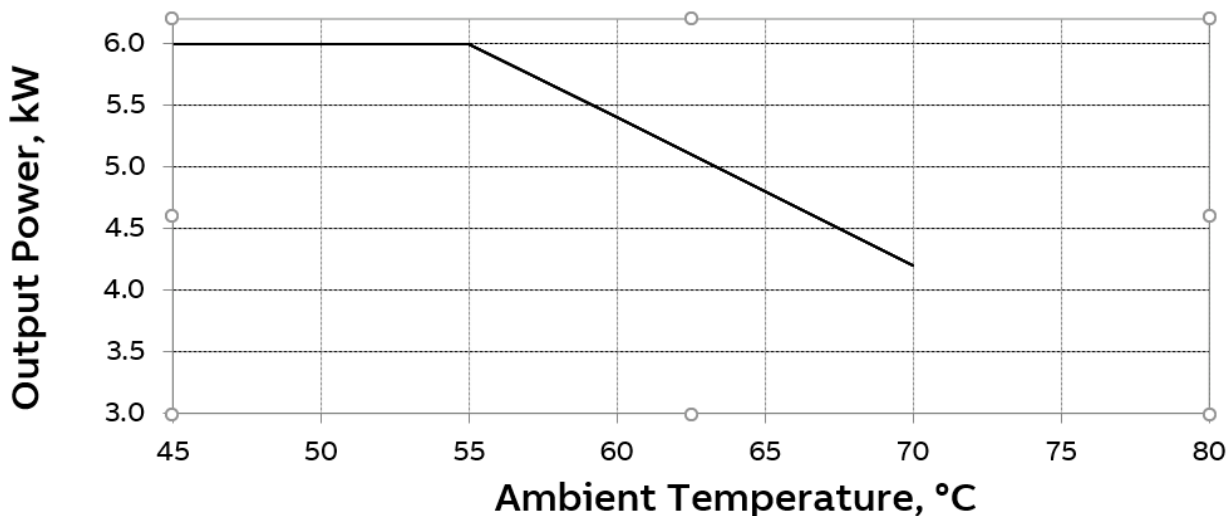



# Detailed Specifications

## Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Input Voltage: Continuous	$V_{IN}$	0	600	$V_{AC}$
Operating Ambient Temperature	$T_A$	-40	70	$^{\circ}C$
Storage Temperature	$T_{stg}$	-40	85	$^{\circ}C$
I/O Isolation voltage to Frame (100% factory Hi-Pot tested)			2121	$V_{AC}$

## Input

Parameter	Symbol	Min	Typical	Max	Unit
Operating Voltage Range (three-phase delta with safety frame ground)	$V_{IN}$	320	380/480	530	$V_{AC}$
Low voltage	Turn-OFF			320	
	Turn-ON			330	
	Hysteresis	5			
High voltage	Turn-OFF	530			
	Turn-ON	520			
	Hysteresis	5			
Input Voltage Phase Inbalance	$V_{IN}$	-15	1	+10	%
Frequency	$F_{IN}$	47		63	Hz
Operating Current (three-phase - all phases operational)	$I_{IN}$			15	$A_{AC}$
Input Current Phase Inbalance [load > 50% of FL]				1.5	%
Inrush Transient (per $\phi$ at $480V_{RMS}$ , $25^{\circ}C$ , excluding X-Capacitor charging)	$I_{IN}$			30	$A_{PK}$
Source Impedance (NEC allows 2.5% of source voltage drop inside a building)		0.20	0.25	0.30	$\Omega$
Idle Power (at $480V_{AC}$ , $25^{\circ}C$ )	Main output OFF			25	W
	Main output ON @ $I_o=0$			45	
Leakage Current (per $\phi$ , $480V_{AC}$ , 60Hz)	$I_{IN}$			5	%
Power Factor (50 – 100% load)	PF	0.96	0.995		
Efficiency ( $380/480V_{AC}$ @ $25^{\circ}C$ )	30-80% load		93/95		%
	50% load		94.5/96.5		
Holdup Time (with no batteries present) ( $V_{in} = 320V_{RMS}$ , $V_{out} \geq 42V_{DC}$ , constant power load)	T	10	12		ms
Ride Through (at $480V_{AC}$ , $25^{\circ}C$ , constant power load)	T	1/2	1		cycle
Isolation (per EN60950)	Input – Output	3000			$V_{AC}$
	Input-Chassis/Signals	2087			$V_{AC}$



# Detailed Specifications, continued

## Output 48 V<sub>DC</sub>

Parameter	Symbol	Min	Typical	Max	Unit	
Output Power ( 380-480V <sub>AC</sub> – three-phase, T <sub>AMB</sub> = -5 – 55°C )	W	6050			W <sub>DC</sub>	
Factory Default Set Point V <sub>IN</sub> = 480V, I = 10% FL, 25°C			52		V <sub>DC</sub>	
Overall Regulation (load, temperature, aging) LOAD>2.5A @25°C T <sub>AMB</sub> > 45°C	V <sub>OUT</sub>	-0.5 -2		+0.5 +2	% %	
Output Voltage Set Range (Target Resolution +/- 0.012 V <sub>DC</sub> )		42		58	V <sub>DC</sub>	
Output Current Range (54 V <sub>DC</sub> /, T <sub>AMB</sub> < 45°C ) V <sub>OUT</sub> = 54V <sub>DC</sub> V <sub>OUT</sub> = 52V <sub>DC</sub>	I <sub>out</sub>	1 1 1		111 115 125	A <sub>DC</sub>	
Current Share ( > 50% FL) Max Units Parallelable Using Physical Address/ Virtual Address		-2		2 20/100	%FL units	
Proportional Current Share Between Different Power Supplies			<7		%FL	
Output Ripple ( 20MHz bandwidth, load > 10%FL) Load < 10%FL	RMS (5Hz to 20MHz) Peak-to-Peak (5Hz to 20MHz) V <sub>OUT</sub>			100 250 400	mV <sub>rms</sub> mV <sub>p-p</sub> mV <sub>p-p</sub>	
Voice Band Output Noise	With 880Ahr Battery in System			45	dBrnC	
	Without Battery			55		
	Psophometric Noise			2	mV <sub>rms</sub>	
External Bulk Load Capacitance	C <sub>OUT</sub>	0		0.17	F	
Turn-On Monotonic Range, Above -5°C		30		100	% V <sub>nom</sub>	
Delay	@480V <sub>in</sub>		5		s	
Rise Time – Fast Mode			100		ms	
Rise Time – Walk-in Mode (default)	55A (50% load )	2.5				
	83A (75% load)	5			s	
	100A (90% load)	8				
Output Overshoot	V <sub>OUT</sub>			2	%	
Load Step Response, ΔV, [load step 20% <->80% Load, @ 1A/μs ] Settling Time to Normal Regulation	V <sub>OUT</sub> T	-5		5 2	% ms	
Overload - Power Limit When V <sub>OUT</sub> ≥ 48V <sub>DC</sub> Recoverable Current Limit When 40V <sub>DC</sub> < V <sub>OUT</sub> < 48V <sub>DC</sub> Output Shutdown (one retry after a 2 – 10 second delay)	P <sub>OUT</sub> I <sub>OUT</sub> V <sub>OUT</sub>	6050 110		120 36	W <sub>DC</sub> %FL V <sub>DC</sub>	
Overload Shutdown Delay at Turn On for Other Module Insertion			20		s	
Short Circuit Protection	No damage					
Overvoltage Protection	200ms Delayed (Default) Immediate Shutdown	V <sub>OUT</sub>	59 > 65	59.5	60	V <sub>DC</sub>
	Programmable Range		44		59.5	
	Latched Shutdown	If one restart fails inside 30s window unit latches OFF				
	Restart Delay		3.5	4	5	sec
Over-Temperature Shutdown Margin (below max device rating ) Restart Attempt Hysteresis (below shutdown level)	T		20 10		°C	
Restart/Reset Conditions	Loss of input > 100ms or Output OFF then ON command					
Isolation Output-Chassis	V	500			V <sub>DC</sub>	

DET 1067

Page 5

© 2020 ABB. All rights reserved.



# Detailed Specifications, continued

## Digital Information Specifications

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Measurement System Characteristics						
Standard Measurement Parameters	Update frequency Report delay after 25% step Report delay to accuracy				1 2 10	Hz sec sec
I <sub>OUT</sub> Measurement Range	Linear	I <sub>MR</sub>	0		130	A <sub>DC</sub>
V <sub>OUT</sub> Measurement Range	Linear	V <sub>OUT(rMR)</sub>	0		70	V <sub>DC</sub>
P <sub>OUT</sub> Measurement Range	Linear	P <sub>OUT(rMR)</sub>	0		6100	W <sub>DC</sub>
Temp Measurement Range	Linear	Temp (rMG)	0		150	°C
V <sub>IN</sub> Measurement Range, Each Phase	Linear	V <sub>IN(rMG)</sub>	0		600	V <sub>AC</sub>
I <sub>IN</sub> Measurement Range, Each Phase	Linear	I <sub>IN(MR)</sub>	0		20	A <sub>DC</sub>
P <sub>IN</sub> Measurement Range, Computed three-phase result	Linear	P <sub>in(rng)</sub>	0		6750	W <sub>in</sub>
P <sub>IN</sub> Measurement Accuracy	10-100% Load	P <sub>in(ACC)</sub>	-150		150	W
Fan Speed Measurement Accuracy			-10		10	%
Fan Speed Control – Duty Cycle	Direct		0		100	%

## Detailed Environmental Specifications

Parameter	Min	Typ	Max	Units	Notes
Ambient Temperature	-40		70	°C	Air inlet from sea level to 5,000 feet. Designed to start and work at an ambient as low as -40°C, but may not meet operational limits until above -5°C
Storage Temperature	-40		85	°C	
Operating Altitude			3048/10000	m / ft	
Non-operating Altitude			8200/30k	m / ft	
Power Derating with Temperature			2.0	%/°C	55°C to 70°C
Power Derating with Altitude			2.0	°C/305 m °C/1000 ft	Above 1524/5000 m/ft; 3962/13000 m/ft max
Humidity	Operating Storage	5 5	95 95	% %	Relative humidity, non-condensing
Shock and Vibration	Operationa l	Meets IPC 9592 Class II, Section 5 and GR-63_CORE requirements			
	Packaged	0.02	0.01	0.02	g <sup>2</sup> /Hz Modified IASTM-D-4728-91 8 hour duration on each axis
Acoustic Noise		55	58	dBA	Confirmation Pending
Earthquake Rating	4			Zone	Meet GR-63_CORE requirements
Airborne Contamination Protection	PCBs conformally coated with UL 94V-0, UL Recognized component (QMJU2) material				

DET 1067

Page 6

© 2020 ABB. All rights reserved.



# Detailed Specifications, continued

## Electromagnetic Compliance


Parameter	Function	Standard	Level	Criteria	Test
AC input	Conducted Emissions	EN55032, FCC part 15 EN61000-3-2, Telcordia GR1089-CORE	A – 6dB margin		0.15 – 30MHz 0 – 2 KHz
	Radiated Emissions	EN55032	A – 6dB margin		30 – 10000MHz
AC Input Immunity	Line surge		3 x V <sub>NOM</sub> 480V	B	1 F only or all 3F
	Line Sags and Interruptions	EN61000-4-11  Output will stay above 40V <sub>DC</sub> @ full load  Sag must be higher than 80Vrms.		A	-30%, 10ms
				B	-60%, 100ms
				B	-100%, 5sec
				A	25% sag for 2 sec
				A	1 cycle interruption
	SEMI-F47 Compliant at derated power. Output will Stay at derating Power	50% Sag	Any Phase	10 cycles @ 50Hz 12 cycles @ 60Hz	
		70% Sag		25 cycles @ 50Hz 30 cycles @ 60Hz	
		80% Sag		50 cycles @ 50Hz 60 cycles @ 60Hz	
	Lightning Surge	EN61000-4-5, Level 4, 1.2/50μs – error free		A	4kV, comm
			A	2kV, diff	
	ANSI C62.41-2002	100kHz ring wave 1.2/50μs-8/20μs 550ns EFT burst	3, Category B 3, Category B	B, Table 2 B, Table 3 B, Table 7	6kV/0.5kA 6kV, 3kA 2kV, severity II
Fast transients	EN61000-4-4		3	A	5/50ns, 2kV (common mode)
Enclosure Immunity	Conducted RF fields	EN61000-4-6	3	A	130dBμV, 0.15-80MHz, 80% AM
	Radiated RF Fields	EN61000-4-3	3	A	10V/m, 80-1000MHz, 80% AM
		ENV 50140			A
	ESD	EN61000-4-2	4	A	8kV contact, 15kV air

RFI 1067  
 Note: Surges and sags applied one phase at a time and all three phases simultaneously; phase angles 0, 90, 270°  
 Page 7



# Physical Specifications

## Overall Dimensions

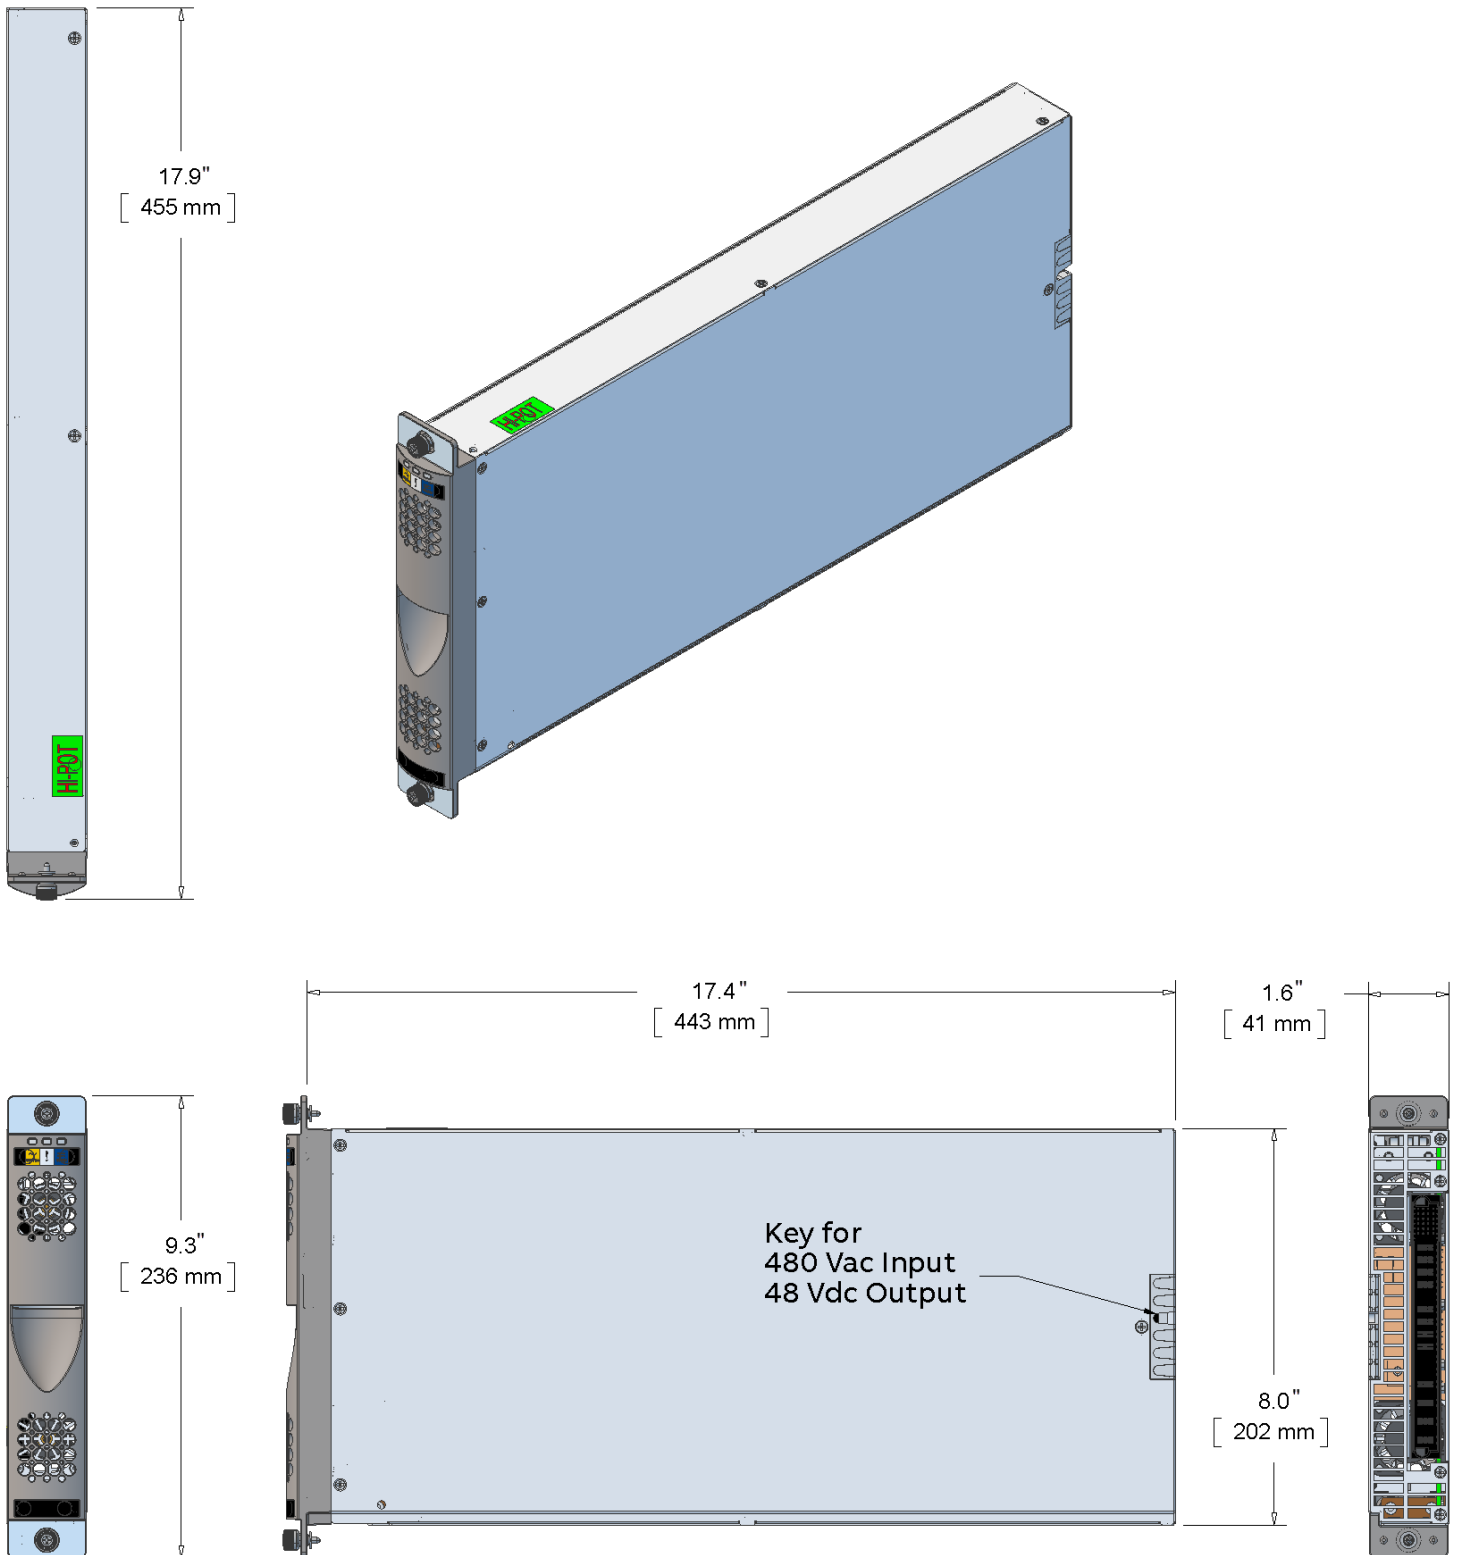

GP100 for Edge Power Architecture [1600092584A]



# LED Reporting Table



		LED State		
Rectifier Condition		AC OK Green	Fault Red	DC OK Green
1	OK	1	0	1
2	Thermal Alarm (5C before shutdown)	1	Blinks	1
3	Thermal Shutdown	1	1	0
4	Defective Fan	1	1	0
5	Blown AC Fuse in Unit	1	1	0
6	AC Present but not within limits	Blinks	0	0
7	AC not present	0	0	0
8	Boost Stage Failure	1	1	0
9	Over Voltage Latched Shutdown	1	1	0
10	Over Current	1	0	Blinks
11	Non-catastrophic Internal Failure	1	1	1
12	Standby (remote)	1	0	0

Item	Description	Comcode
GP100 for Edge	True three-phase 380-480 VAC to 48 VDC, 6kW rectifier for data centers	1600092584A



---

**GE by ABB**

601 Shiloh Rd.

Plano, TX USA

**[Go.ABB/Industrial](#)**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

\*All other trademarks are the property of their respective owners.

DET 1067

Page 10

© 2020 ABB. All rights reserved.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2020 ABB

All rights reserved