




POWER BREAK®

General Purpose Enclosures For 800-4000A Frames

INTRODUCTION

Power Break circuit breakers are suitable for continuous operation in open air or within an enclosure. When mounted in an enclosure, it is recommended that minimum dimensions as listed below be adhered to. In addition all breakers should be applied in accordance with appropriate local and national codes.

NOTE: Breaker must be centered in enclosure width. Refer to appropriate outline drawings for breaker dimensions.

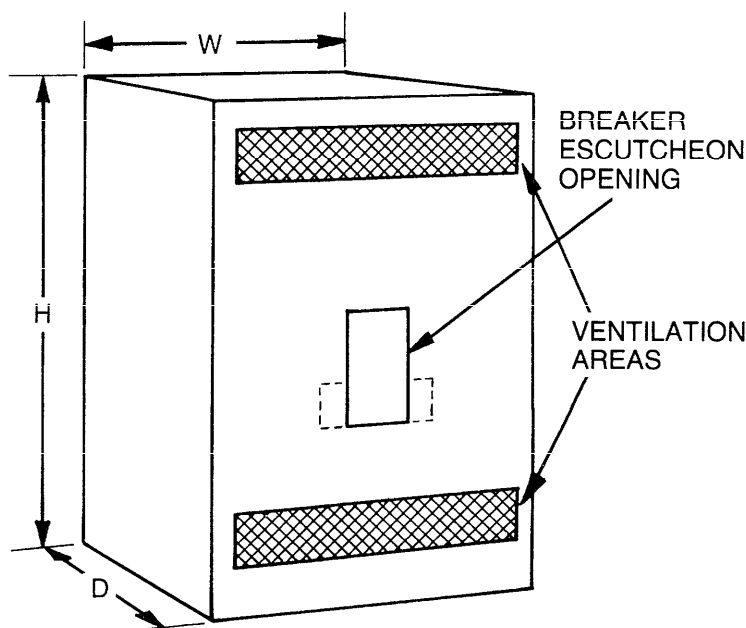

Circuit Breaker Frame Size	Enclosure Internal Dimensions (Inches)			Ventilation Area (Sq. Inches)		Min. Dim. To Grounded Metal (Inches)*
	H	W	D	Top	Bottom	
800	21	22	10.5	4.5
1600/2000	28	22	10.5	30	30	5
2500	36	30	15.5	80	80	8
3000	42	32	15.5	135	135	8
4000	51	29	17	135	135	8

*Measured from LINE END of breaker to uninsulated grounded metal.

© 1985 GENERAL ELECTRIC COMPANY

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the General Electric Company.

For further information call or write your local General Electric Sales Office or . . .

General Electric Company
41 Woodford Avenue
Plainville, CT 06062 U.S.A.