

Midwest Electric Products

Transfer Switches & Power Inlets

Midwest Electric delivers confident, reliable generator power switching



Midwest Electric Transfer Switches



GS1202B20UL

Midwest Electric heavy duty manual transfer switches help provide reliable transfer of power from the normal utility-supplied source to a standby generator, enabling the user to readily maintain power during utility outages. Use them anywhere an extended outage would result in severe loss, damage or inconvenience.

Designed to be operational and switchable at full rated capacity, Midwest Electric transfer switches are available in single- and three-phase configurations at ratings through 600V. The double-throw mechanism helps prevent dangerous backfeeding of generator power into the utility system.

Electrical ratings

- 100-400 amperes
- 240V and 600V models
- 10kAIC

Rugged durability

- Break before make switch mechanism*
- All-in-one construction with factory-assured terminations
- Bus bars interconnect main and standby switches*
- Knife blade switch contacts help provide long life
- NEMA 3R weatherproof enclosure
- G90 galvanized steel construction for superior corrosion protection
- Durable polyester powder coat finish resists chipping and fading
- High quality, user-tested components designed for long life

User protection

- Interlock allows door opening only when switch is in the OFF position*
- Padlock provision in all three ON-OFF-ON transfer positions
- Padlock provision on door
- Clear line shield for visual verification of blade position while helping guard against contact with live parts

Installation ease

- Optional neutral kits available for both 240V and 600V models
- Broad range of concentric knockouts accommodate varying wiring needs
- All terminals accept copper or aluminum wire for installation flexibility



*On most models

Transfer Switch Selection

Two Pole, 100-400 Amps, 240V

Fig.	Model Number	Switch Ratings			Optional Neutral Kit ¹
		Amps		Poles	
		Main	Standby		
A	GS1101B12UL	100	100	2	NEU102
	GS1201B20UL	200	100		NEU202
	GS1202B20UL ²	200	200		NEU202
	GS1402B01UL	400	200		NEU407
	GS1404B01UL	400	400		NEU407

¹ Order Neutral Kit for 3-wire system (120/240).

² Available with meter socket (consult main catalog).




Fig. A

Three Pole, 200-400 Amps, 240V

Fig.	Model Number	Switch Ratings			Optional Neutral Kit ¹
		Amps		Poles	
		Main	Standby		
B	GS3402B01UL	400	200	3	NEU407
	GS3404B01UL	400	400		

¹ Order Neutral Kit for 4-wire system (208Y/120).




Fig. B

Three Pole, 100-400 Amps, 600V

Fig.	Model Number	Switch Ratings			Optional Neutral Kit ¹
		Amps		Poles	
		Main	Standby		
B	GS3161B12UL ²	100	100	3	NEU102
	GS3262B25UL ³	200	200		NEU202
	GS3464B01UL	400	400		NEU407

¹ Order Neutral Kit for 4-wire systems (208Y/120, 480Y/277, 600Y/347).

² Available in light duty construction (aluminum enclosure) – order model number GS3161G.

³ Available in light duty construction (aluminum enclosure) – order model number GS3262G.

All three pole models are suitable for use in single phase, 3-wire, switched neutral applications – no neutral required.

Technical Data

Model Number	Wire Range (cu/al)	Conduit Hub/Opening ¹		Enclosure Style	Dimensions (inches)				Knockout Figure	Unit Wt. (lbs)
		Qty.	Size		Height (A)	Width (B)	Depth (C)	Depth (D)		
GS1101B12UL	12-1/0	1	1-1/4	A	26	13	6-3/4	10-5/8	1	31
GS3161B12UL					26	13	6-3/4	10-5/8	1	31
GS1201B20UL	6-250	1	2	A	32	15-3/4	6-3/4	10-5/8	2	42
GS1202B20UL					35	15-3/4	7	10-5/8	2	46
GS3262B25UL			2-1/2	A	34-3/4	15-3/4	6-3/4	10-5/8	2	48
GS1402B01UL	2-600 or (2) 1/0-250	2	Closure Caps	A	43-1/2	18-1/2	9-1/4	14-1/8	3	71
GS3402B01UL					42-1/2	24	9-1/4	14-1/8	4	107
GS1404B01UL					43-3/4	18-1/2	9-1/4	14-1/8	3	80
GS3404B01UL					43-1/2	24	9	14-1/8	4	120
GS3464B01UL					43-1/2	24	9	14-1/8	4	120

¹ Switch includes conduit hub or closure cap(s) as indicated. For alternate conduit hub sizes, see Midwest Catalog MET-017.

Cabinet Dimensions




Fig. A

Knockout Configurations




Fig. 1




Fig. 2




Fig. 3




Fig. 4

Knockout Key

B = 1", 1-1/4", 1-1/2"

C = 1-1/4", 1-1/2", 2"

G = 1/2", 3/4", 1"

I = 11/16"

J = 2", 2-1/2", 3", 3-1/2"

R = 3/4", 1", 1-1/4", 1-1/2", 2"

U = 1/4"

Midwest Electric Power Inlets



U030N

Power inlets from Midwest Electric work with the manual transfer switches for standby power. Each inlet comes in a single enclosure for maximum protection against weather and normal field use.


- All-in-one construction and factory assured terminations help reduce installation time
- NEMA 3R weatherproof enclosure
- G90 galvanized steel construction for superior corrosion protection
- Durable polyester powder coat finish resists chipping and fading
- Rolled edge door for cord protection
- Cover design accommodates cords in place while maintaining NEMA 3R integrity
- Padlockable to help prevent unauthorized access
- Deadfront constructions help prevent accidental contact with live parts



Technical Data

20-50 Amps, 120/240V


Model Number	Amps	Receptacle(s)	Dimensions (inches)		
			Height	Width	Depth
U020N	20	L14-20	14-3/8	6-3/4	5-3/16
U030N	30	L14-30			
U022N	40	(2) L14-20 ¹			
U050N	50	CS6375 ²			

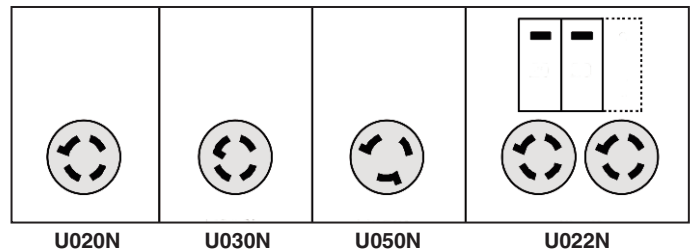

¹ Also includes (2) MHQL1120 20A circuit breakers and one breaker space

² California Standard, 3-pole, 4-wire grounded non-NEMA

Knockout Configuration



Knockout Key

G = 1/2", 3/4", 1"

S = 1/2", 3/4", 1", 1-1/4", 1-1/2"

Midwest Electric Products
305 Gregson Drive
Cary, NC 27511
Customer Service: 866-685-0577
Fax: 804-965-1041
www.midwestelectric.com

© 2019 Midwest Electric Products

MET-013D (12/19)

Information provided is subject to change without notice. Please verify all details with Midwest. All values are design or typical values when measured under laboratory condition, and Midwest makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.

