



# Transformer




\*1M0000000\*

**Catalog Number**      Type QL  
**9Q3C112AFAD00A5T00**  
 9T83S9805


**112.5 KVA 60 HZ 3 PH 5.2 % IMP**

40 C AMB.    150 C RISE    220 C SYSTEM    IS-19C  
 Note: Design is based on 112.5KVA & 150C Rise 5.2% Imp.

PRIMARY (X)    208 VOLTS (LINE-LINE)  
 SECONDARY (H)    480 VOLTS (LINE-LINE)  
                           277 VOLTS (LINE-NEUTRAL)

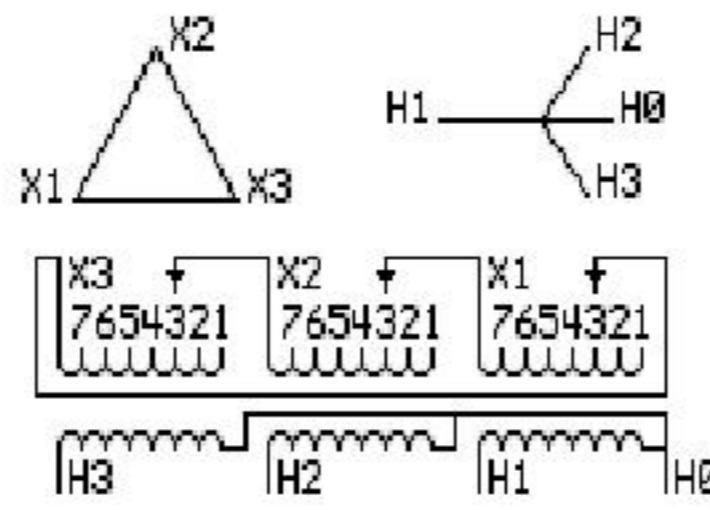

### COIL TAP ARRANGEMENT

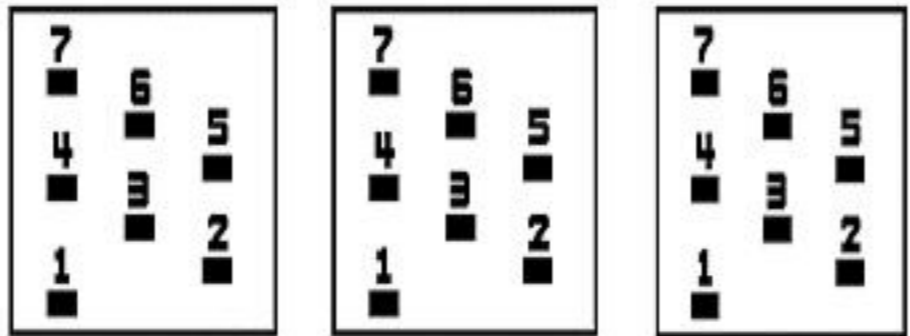

JUMPER CONNECTION	
TAP	VOLTS
1	218
2	213
3	208
4	203
5	198
6	193
7	188

**NET WGT**  
 950 LB  
 430.9 Kg  
 36793  
 XV375  
 NOG  
 110315

INSPECTION  
 &  
 FINAL TEST  
 N545!



ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18S4317G06

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001  
 COPPER CONDUCTOR      PRIMARY: 10 KV BIL      SECONDARY: 10 KV BIL

Outline: 303B401SAP075

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

Assembled in Mexico

H3 - H2 - H1 - -  
 - X3 - X2 - X1

Note: H0 Terminal at the bottom

H1 - X1  
 H2 - X2  
 H3 - X3  
 H1 - X1  
 H2 - X2  
 H3 - X3  
 H0  
 H1 - X1  
 H2 - X2  
 H3 - X3  
 H0

