

Power Inlets



T020N 20 Amp, L14-20 Twist lock Power Inlet

T030N 30 Amp, L14-30 Twist lock Power Inlet

Application Information

Power Inlets for portable and outdoor generators are used in conjunction with a generator panel, load center with an interlock kit, or a manual transfer switch for stand-by power. General Electric's Power Inlets provide an inlet in a single enclosure that provides maximum protection against weather and normal field use.

Features and Benefits

Save Costly Installation Time


- G90 Galvanized steel with superior electro-deposition paint finish provides excellent corrosion protection
- All-in-one construction for factory assured terminations
- Rolled edge door for cord protection
- Cover design allows cords to exist while maintaining the NEMA 3R integrity
- Padlock provision to help prevent unauthorized access
- Dead front construction prevents accidental contact with live parts
- cUL Listed



Power Inlets

Technical Information

Catalog #	Receptacles	Amps	Volts	A	B	C	UL
T020N	L14-20	20	120/240	14 - 3/8"	6 - 3/4"	5 - 3/16"	Canada, US
T030N	L14-30	30	120/240	14 - 3/8"	6 - 3/4"	5 - 3/16"	Canada, US

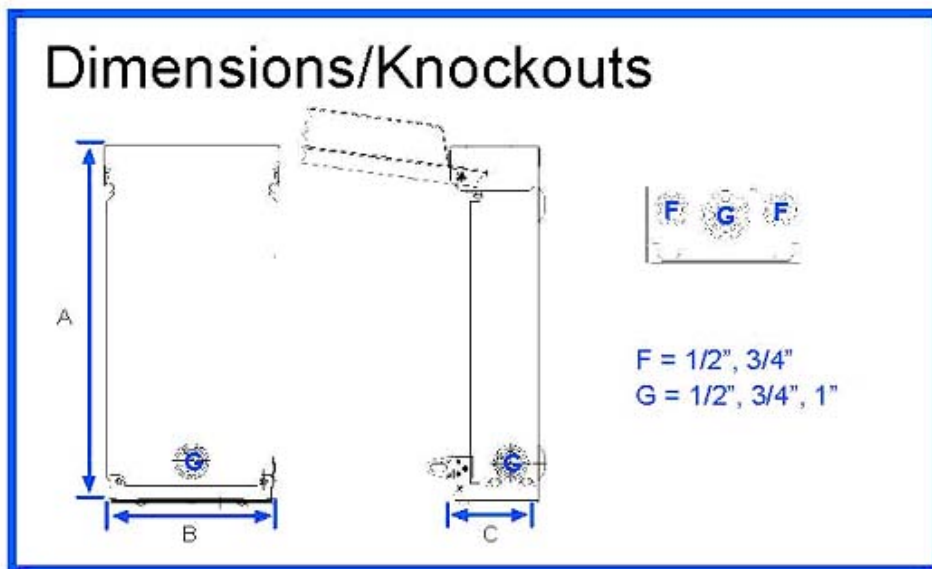

GE Consumer & Industrial
 41 Woodford Avenue, Plainville, CT 06062
www.GEindustrial.com

© 2005 General Electric Company



Imagination at work

DET - 435 05/05