


MULTIPLES OF AMPERE SETTING (CONTINUOUS)

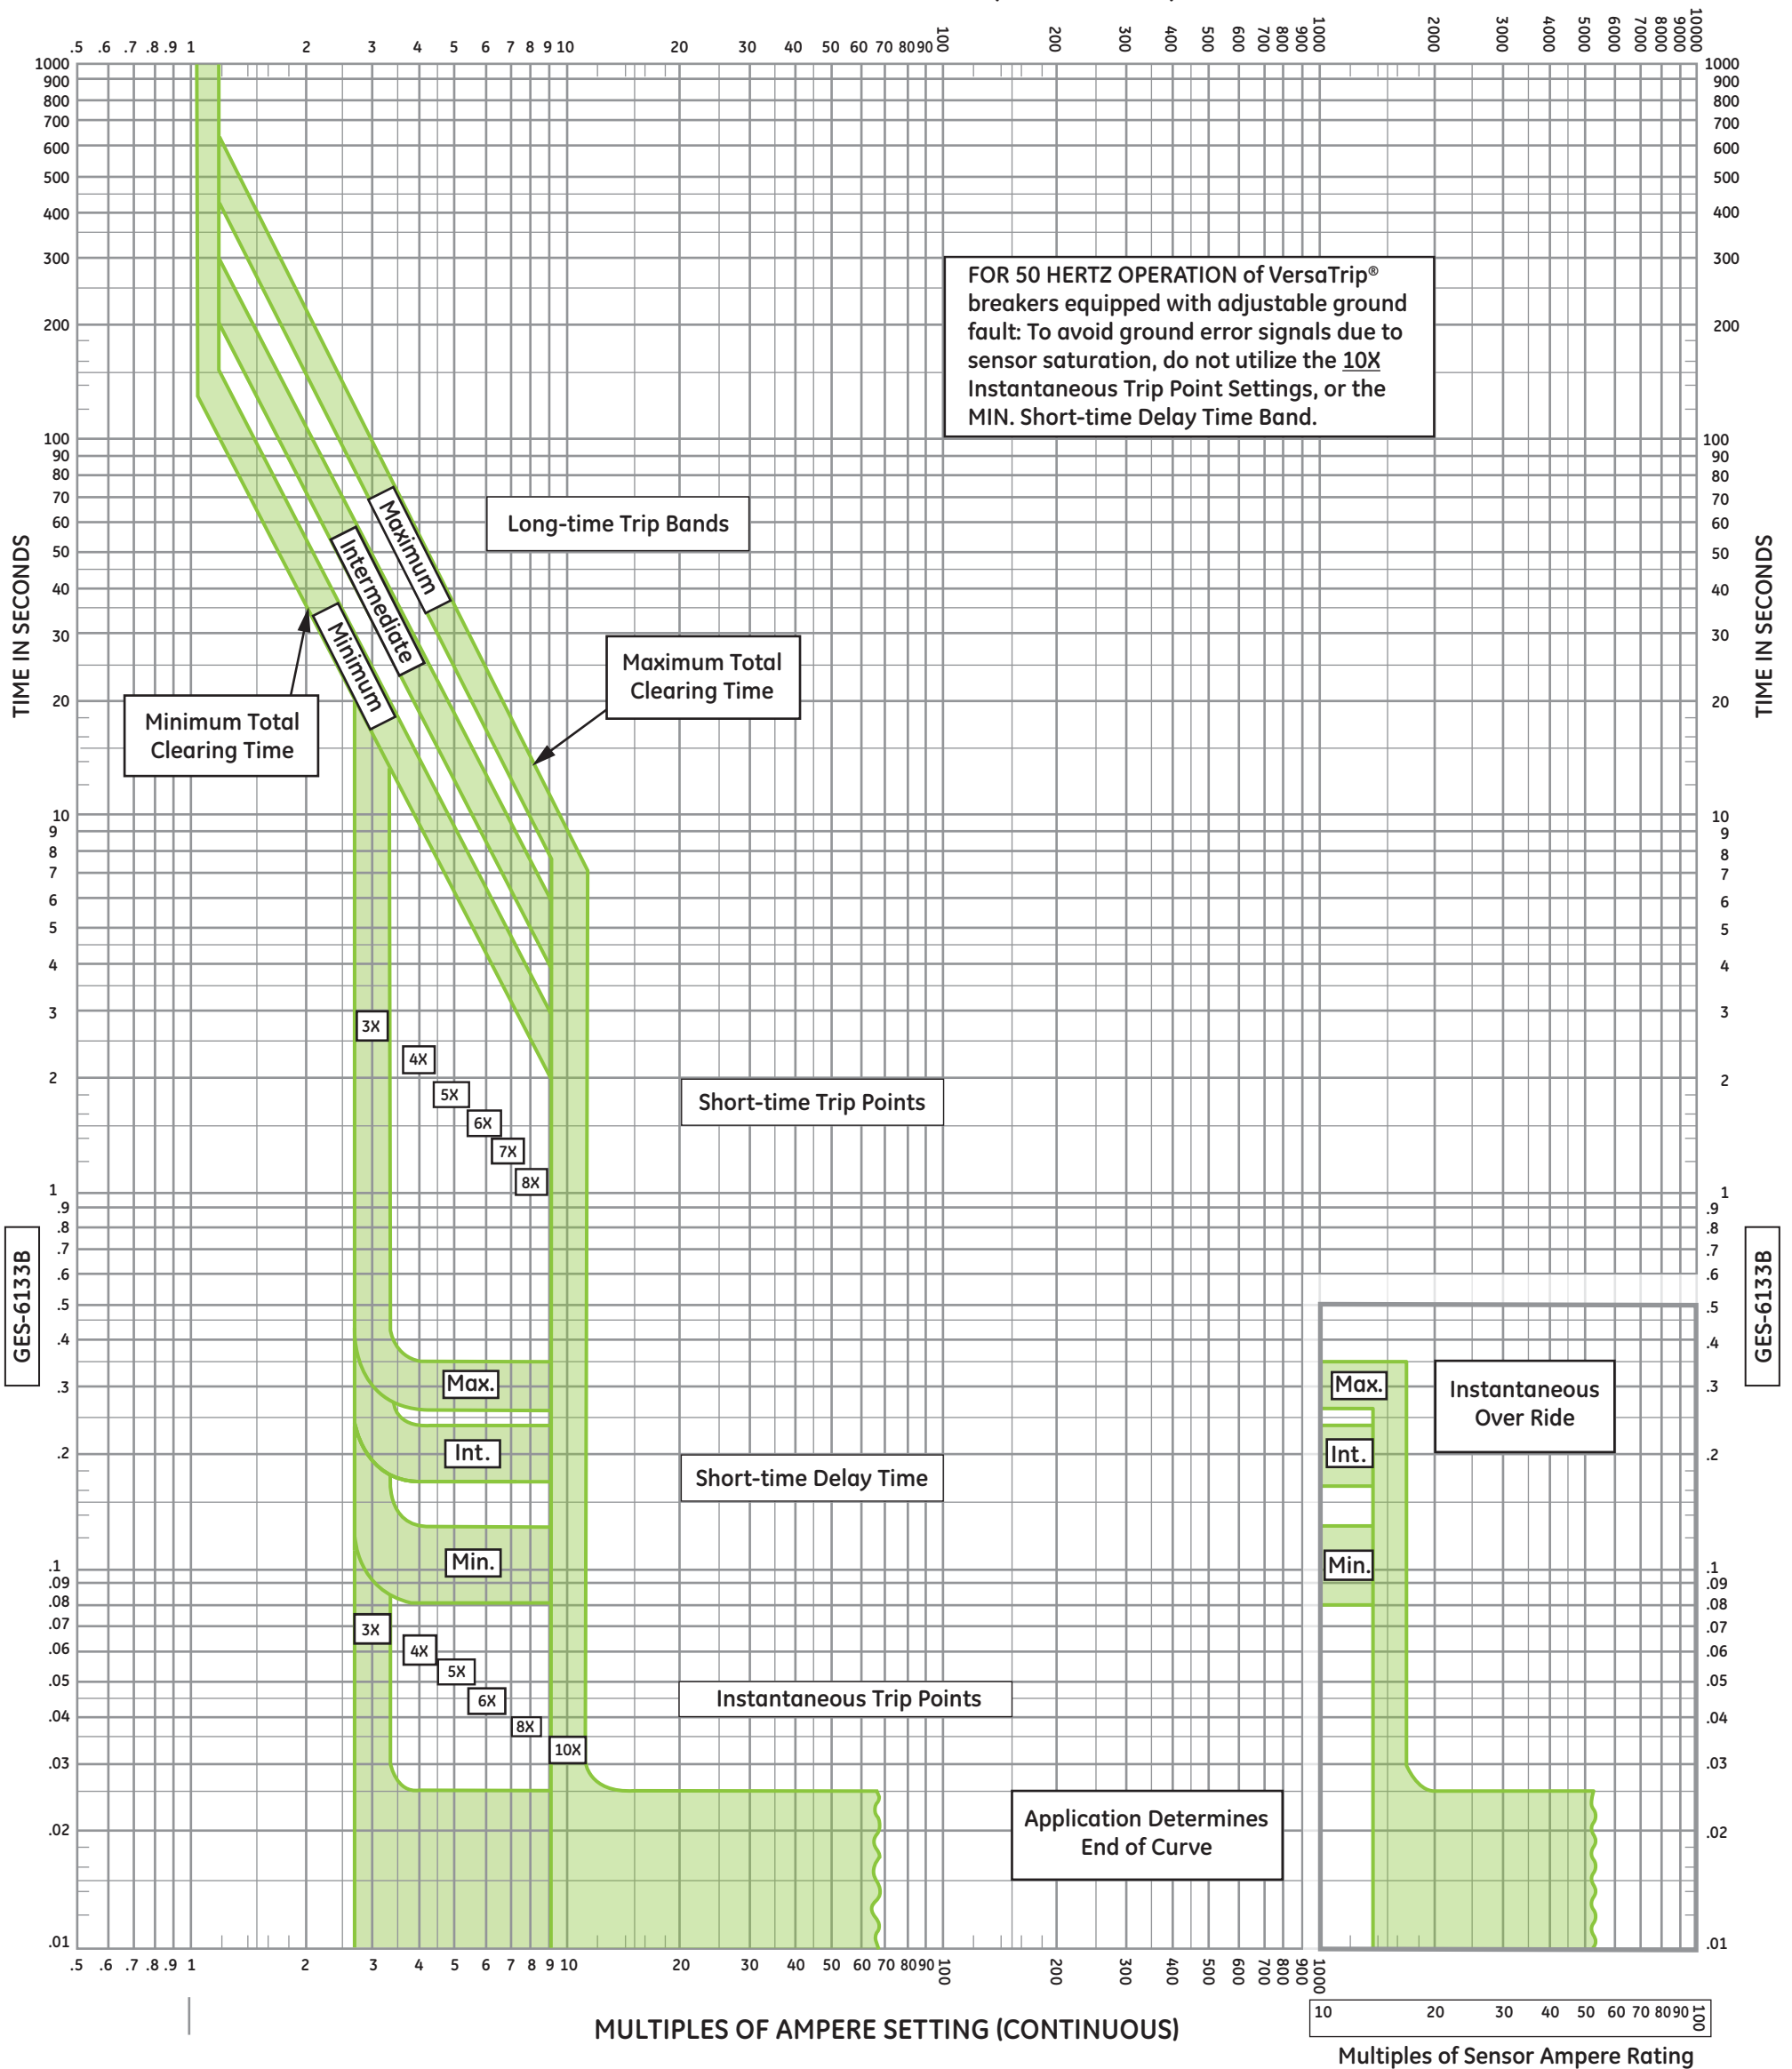

GE Consumer & Industrial -
Electrical Distribution

Sensor Rating (Amperes)

150, 200, 300, 400, 500, 600, 800, 1000,
1200 amperes

Voltage Rating

600 Vac

Frequency Rating

50/60 Hertz

**Molded Case Circuit Breaker
with Solid State VersaTrip®**

Types TJS, TJSS, TKS, THKS and THKSS
Long-time, Short-time and
Instantaneous Time-current Curves


Curves apply at 50/60 Hertz and
from -20°C to +55°C breaker ambient.

GES-6133B

Adjustments

Long-time Delay Unit: Continuous current settings are 60, 70, 80, 90 and 100% of sensor rating. Time-delay bands are maximum, intermediate and minimum.
Short-time Delay Unit: Pick-up current settings are 3x, 4x, 5x, 6x, 7x and 8x multiples of long-time unit setting. Time-delay bands are maximum, intermediate and minimum.
Instantaneous Unit: Pick-up current settings are 3x, 4x, 5x, 6x, 8x and 10x multiples of long-time unit setting through 1200 amperes.
Instantaneous Over-ride: Set at 15x sensor ampere rating when the adjustable instantaneous unit is omitted.

MULTIPLES OF AMPERE SETTING (CONTINUOUS)

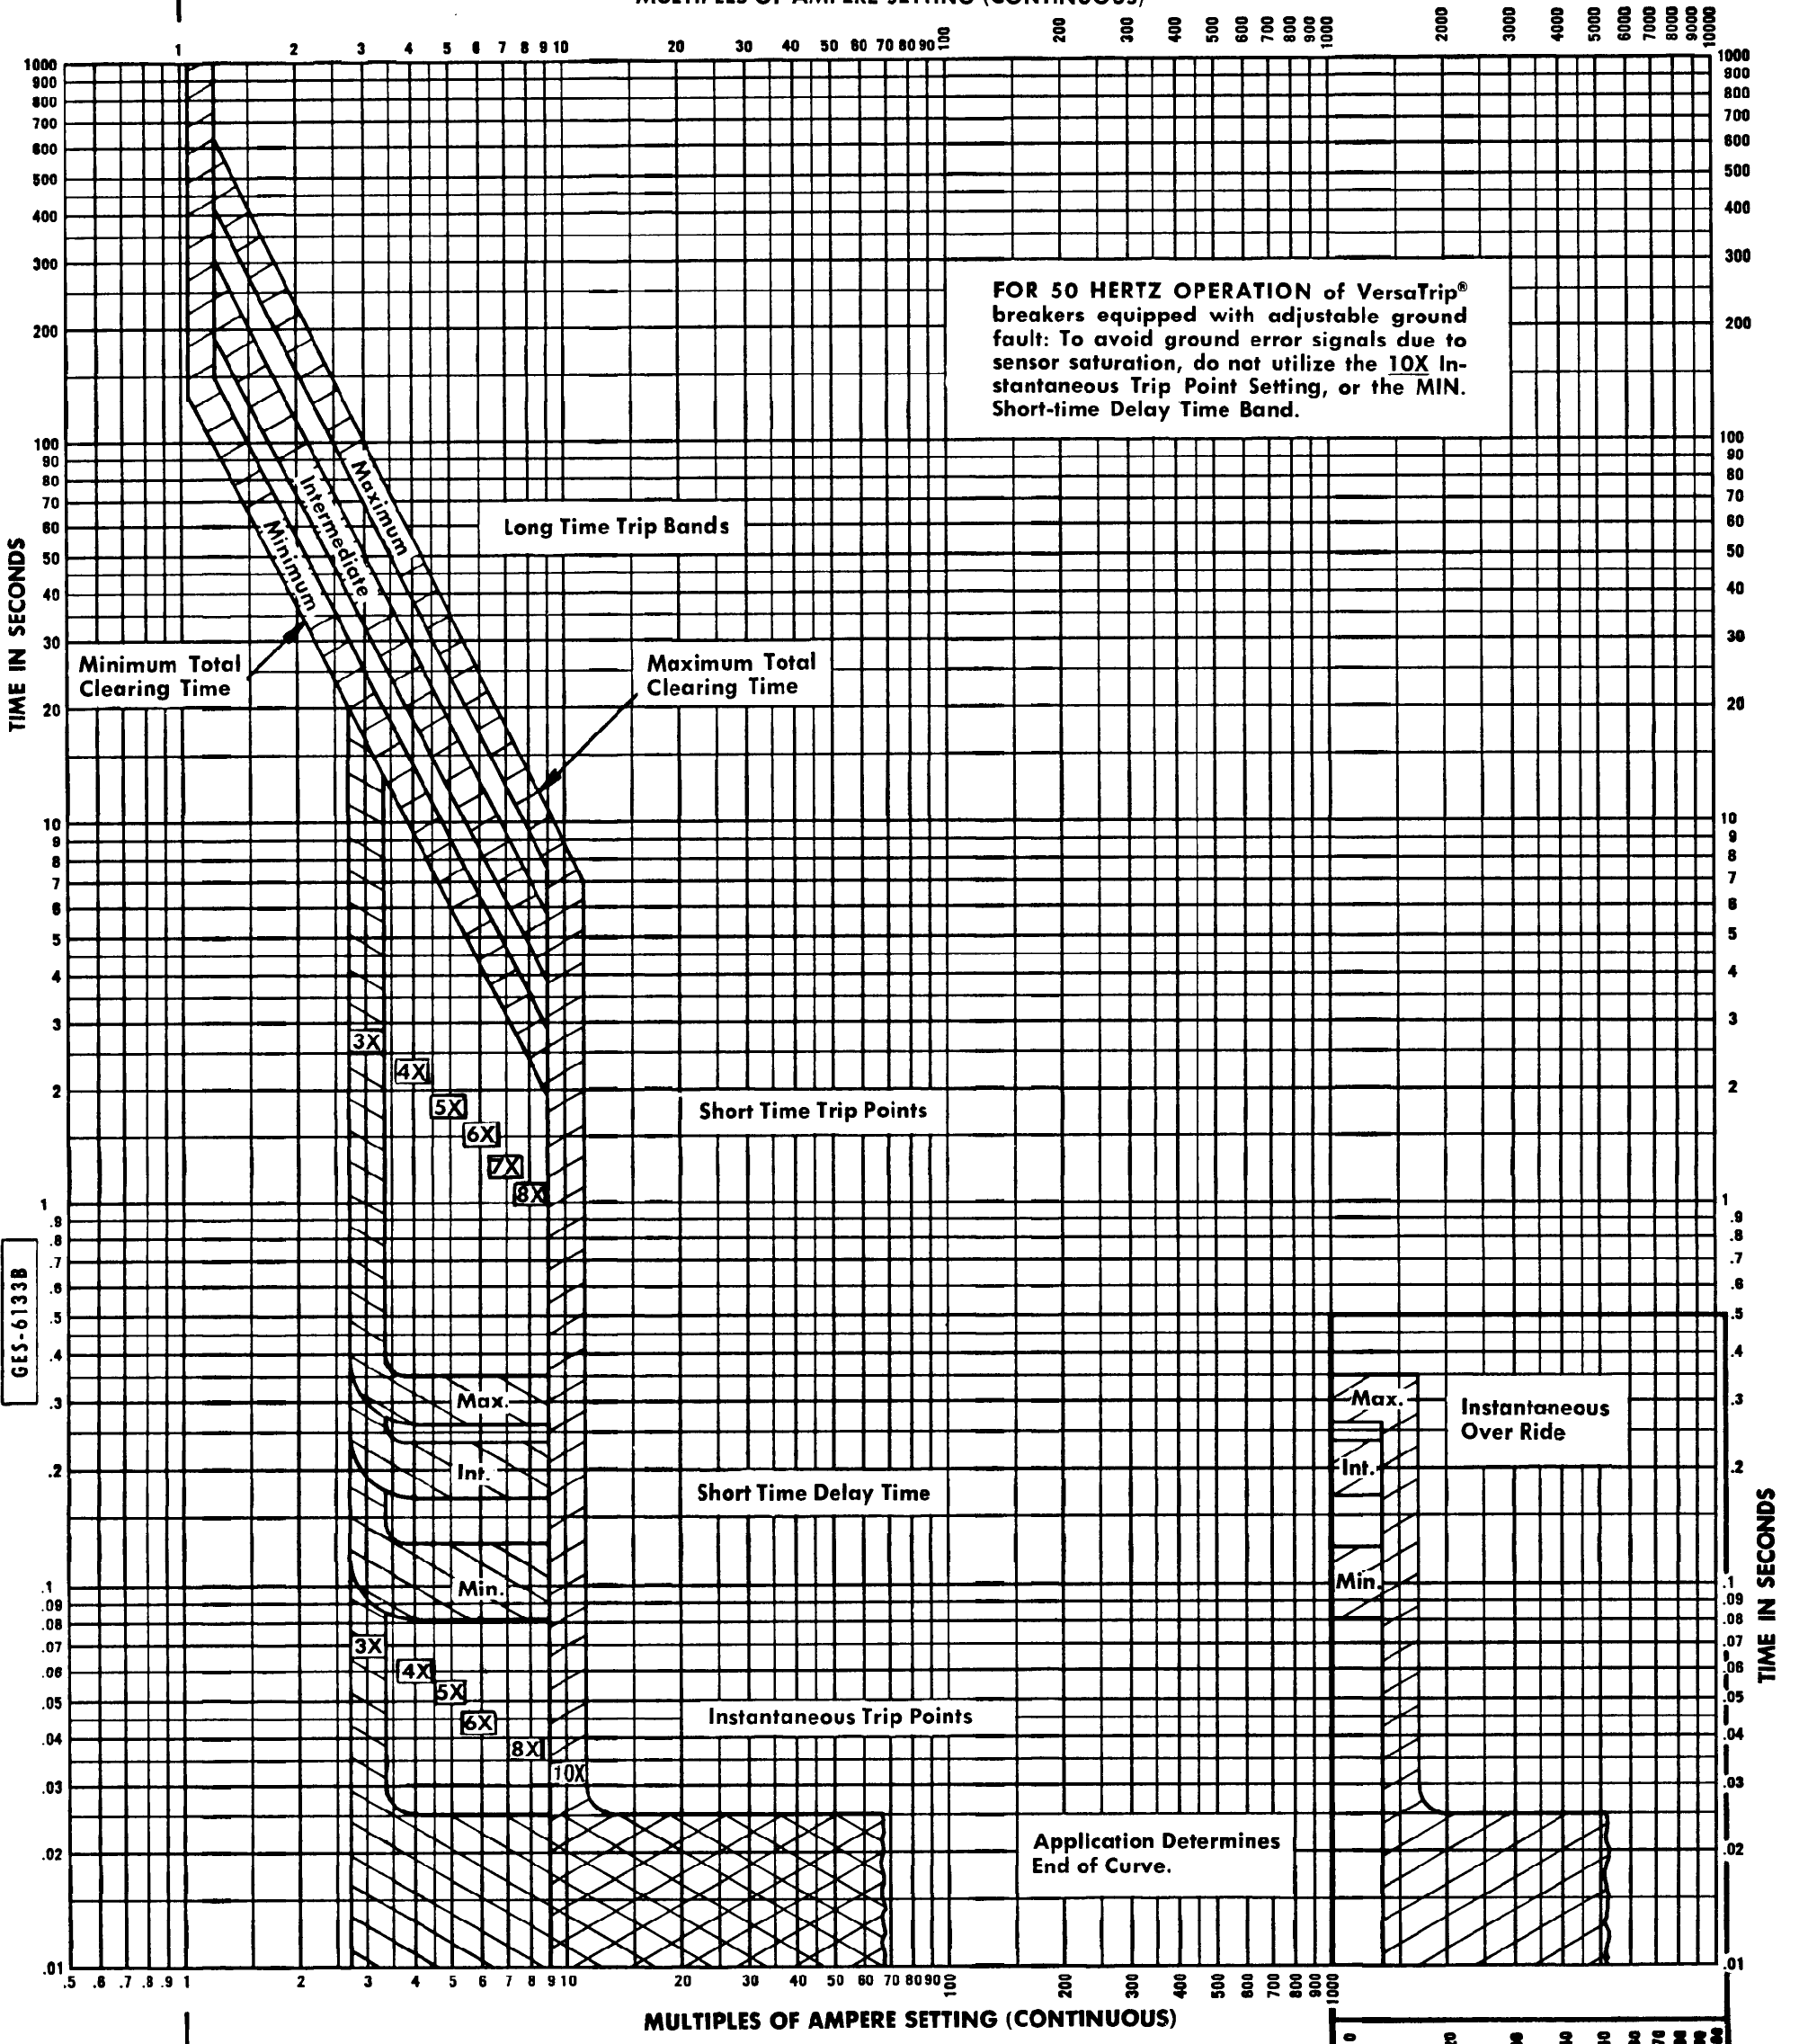

GES-6133B

TIME IN SECONDS

MULTIPLES OF AMPERE SETTING (CONTINUOUS)

Multiples of Sensor Ampere Rating.

GENERAL ELECTRIC

MOLDED CASE CIRCUIT BREAKER WITH

Solid State

VersaTrip®

Types TJS, TJSS, TKS, THKS and THKSS Long-time, Short-time and Instantaneous Time-current Curves

(Curves apply at 50/60 Hertz and from -20C to +55C breaker ambient)

Sensor Rating (Amperes)
150, 200, 300, 400, 500, 600,
800, 1000, 1200 amperes

Voltage Rating
600 Volts ac

Frequency Rating
50/60 Hertz

GES-6133B

Adjustments

Long-time Delay Unit: Continuous current settings are 60, 70, 80, 90 and 100% of sensor rating. Time-delay bands are maximum, intermediate and minimum.

Short-time Delay Unit: Pick-up current settings are 3x, 4x, 5x, 6x, 7x and 8x multiples of long-time unit setting. Time-delay bands are maximum, intermediate and minimum.

Instantaneous Unit: Pick-up current settings are 3x, 4x, 5x, 6x, 8x and 10x multiples of long-time unit setting thru 1200 amperes.

Instantaneous Over-ride: Set at 15x sensor ampere rating when the adjustable instantaneous unit is omitted.