


MULTIPLES OF AMPERE SETTING (CONTINUOUS)

Multiples of Sensor Ampere Rating



MULTIPLES OF AMPERE SETTING (CONTINUOUS)

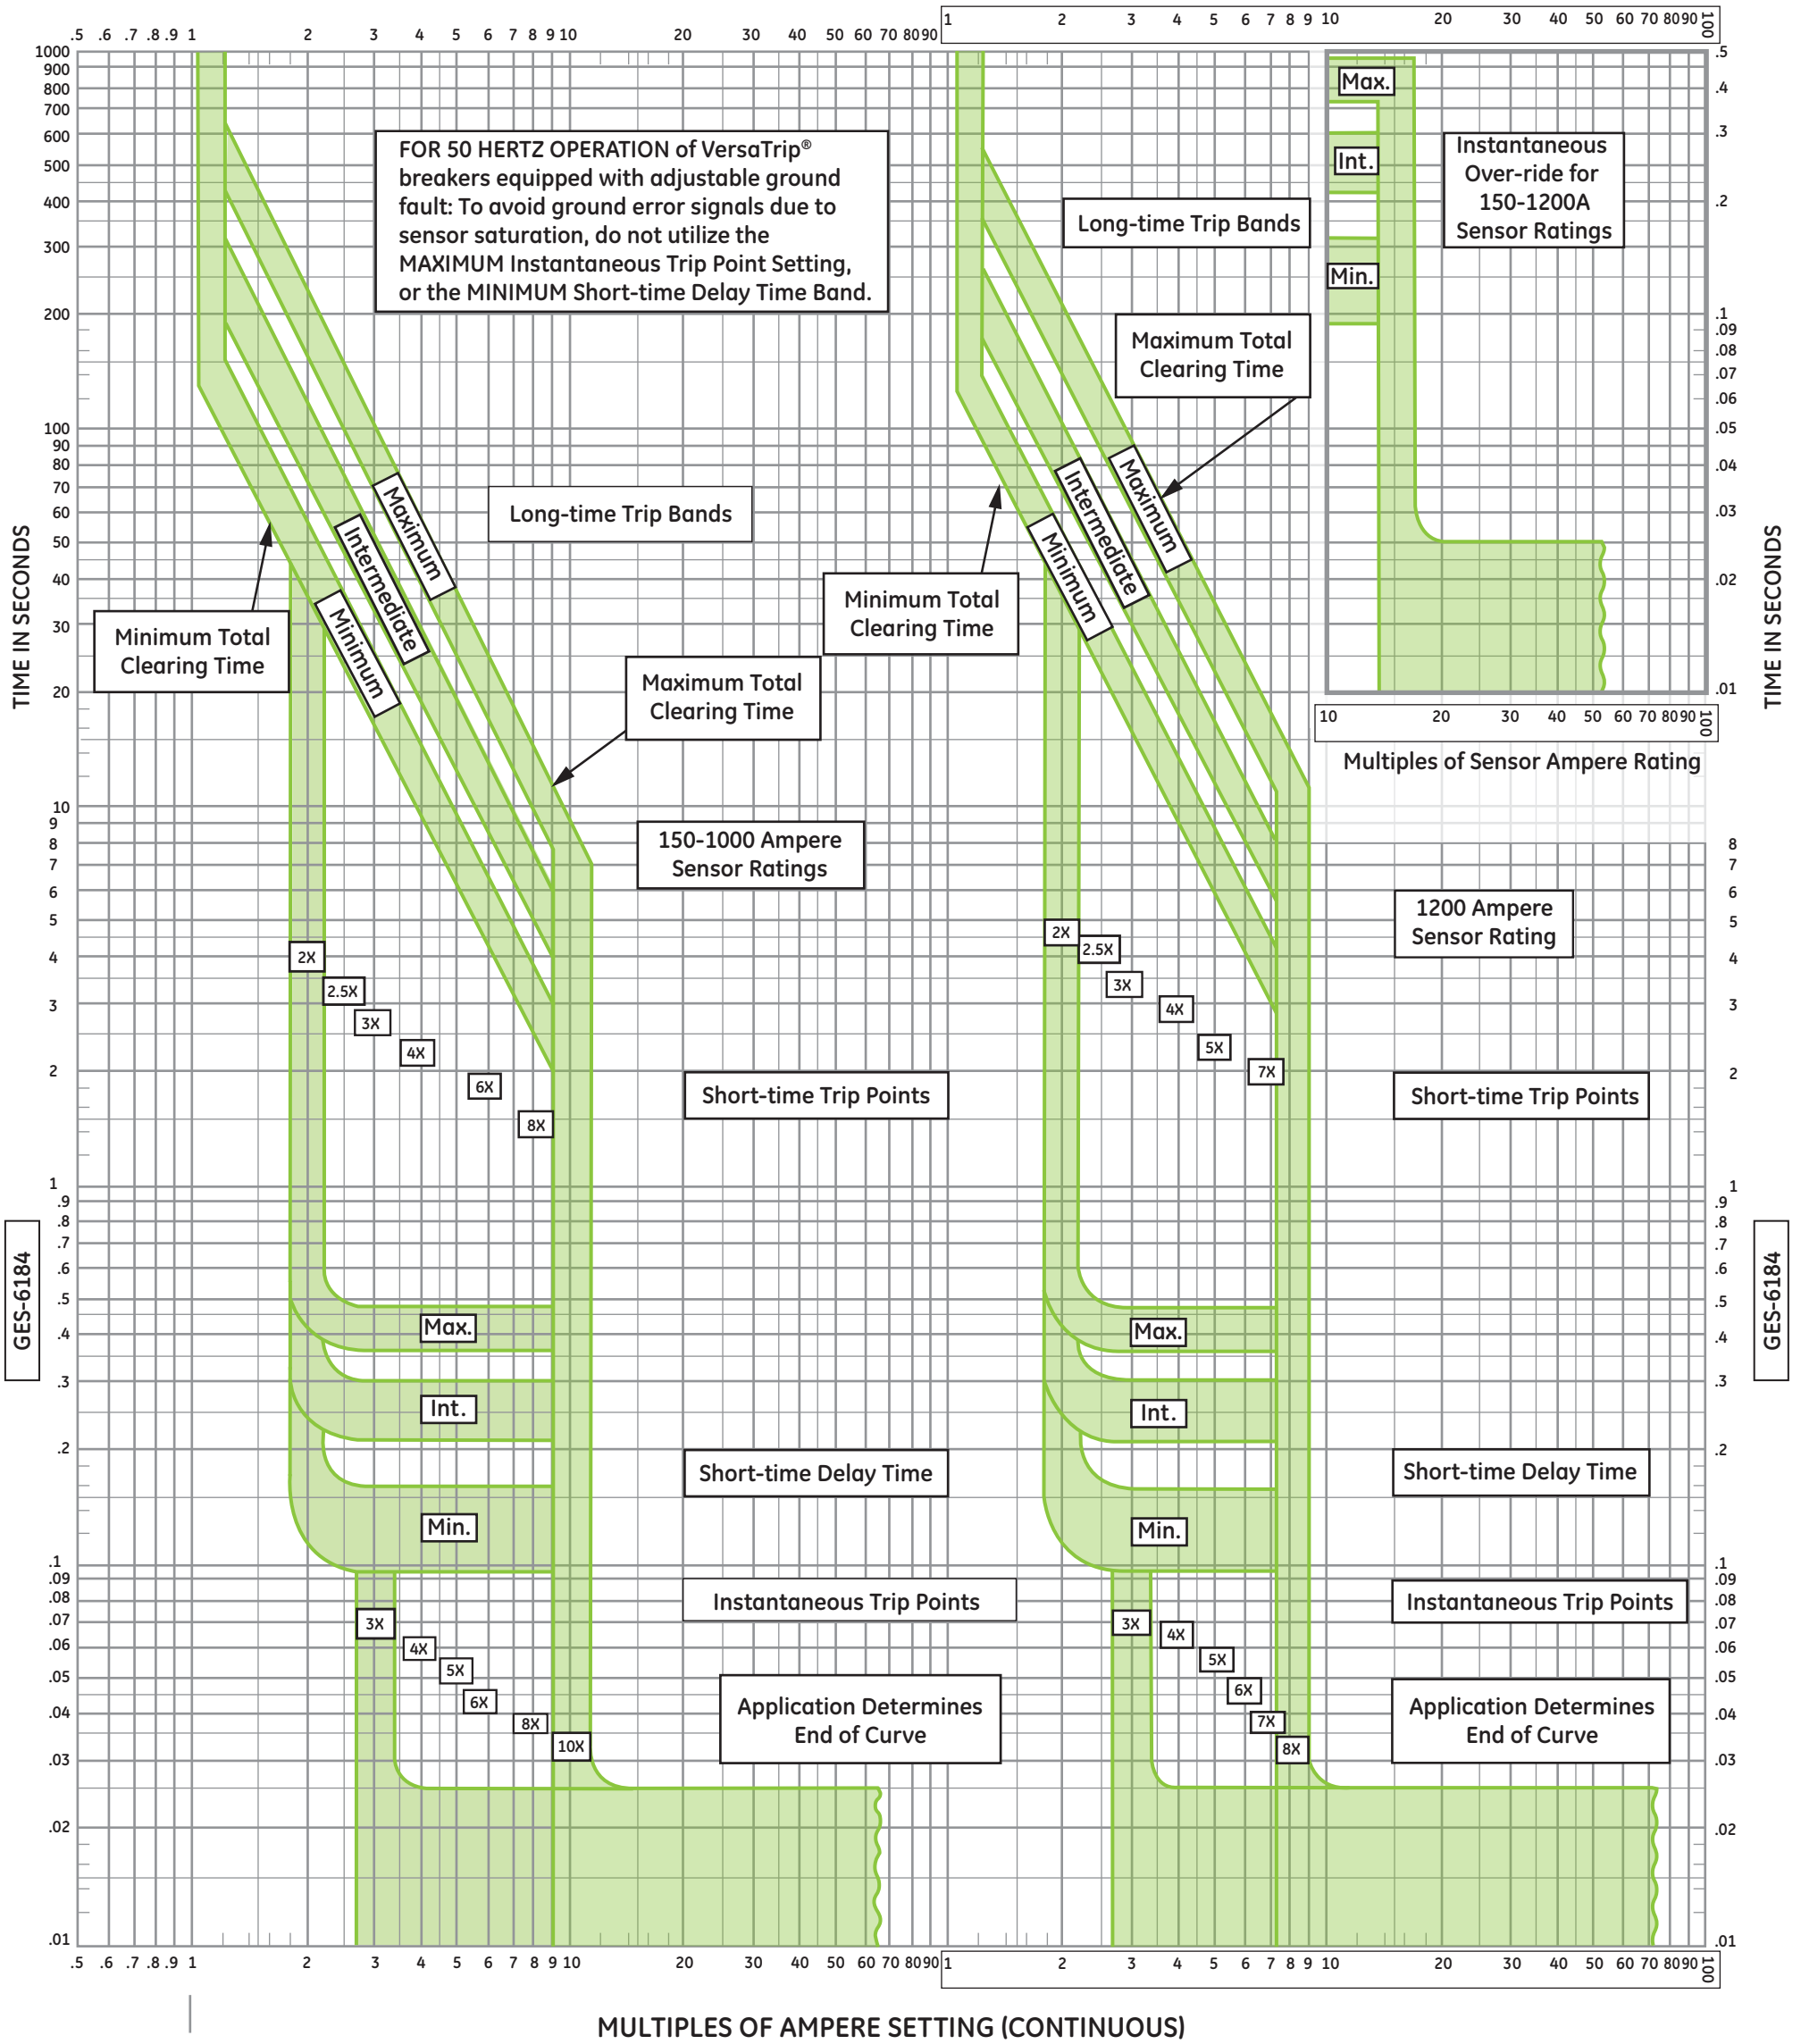

GE Consumer & Industrial - Electrical Distribution

Sensor Rating (Amperes)

150, 200, 300, 400, 500, 600, 800, 1000, 1200 amperes

Voltage Rating

600 Vac

Frequency Rating

50/60 Hertz

Molded Case Circuit Breaker with Solid State VersaTrip® MOD2

Types TJS, TJSS, TKS, THKS and THKSS Long-time, Short-time and Instantaneous Time-current Curves

Curves apply at 50/60 Hertz and from -20°C to +55°C breaker ambient.

GES-6184

Adjustments

Long-time Delay Unit: Continuous current settings are 50, 60, 70, 80, 90 and 100% of sensor rating. Time-delay bands are maximum, intermediate and minimum.

Short-time Delay Unit: Pick-up current settings are 2X, 2.5X, 3X, 4X, 6X and 8X multiples of long-time unit setting through 1000A sensor rating, and 2X, 2.5X, 3X, 4X, 5X and 7X for the 1200A sensor rating. Time-delay bands are maximum, intermediate and minimum.

Instantaneous Unit: Pick-up current settings are 3X, 4X, 5X, 6X, 8X and 10X multiples of long-time unit setting through 1000A sensor rating and 3X, 4X, 5X, 6X, 7X and 8X for the 1200A sensor rating.

Instantaneous Over Ride: Set at 15X for sensor ampere rating when the adjustable instantaneous unit is omitted.