
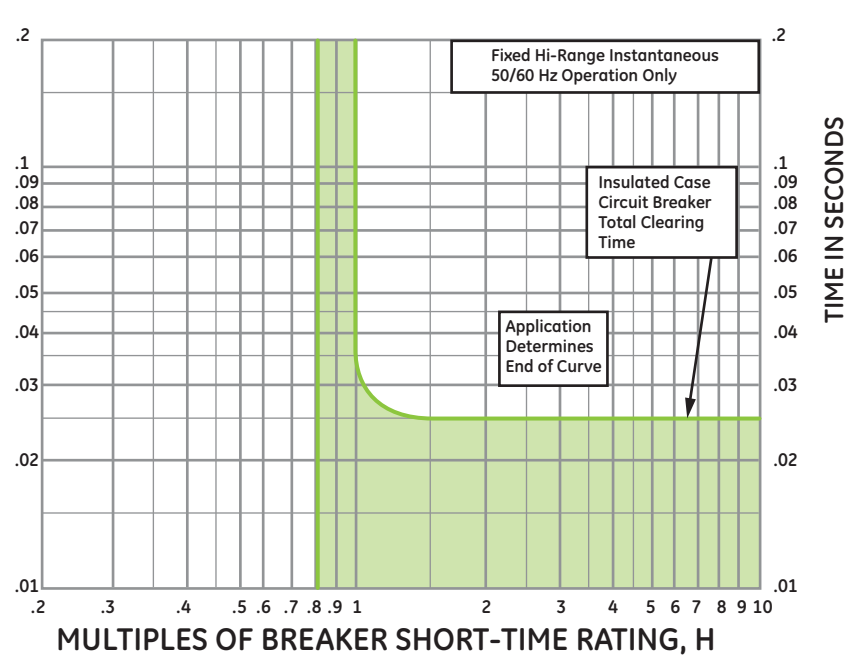



MULTIPLES OF CURRENT SETTING, C

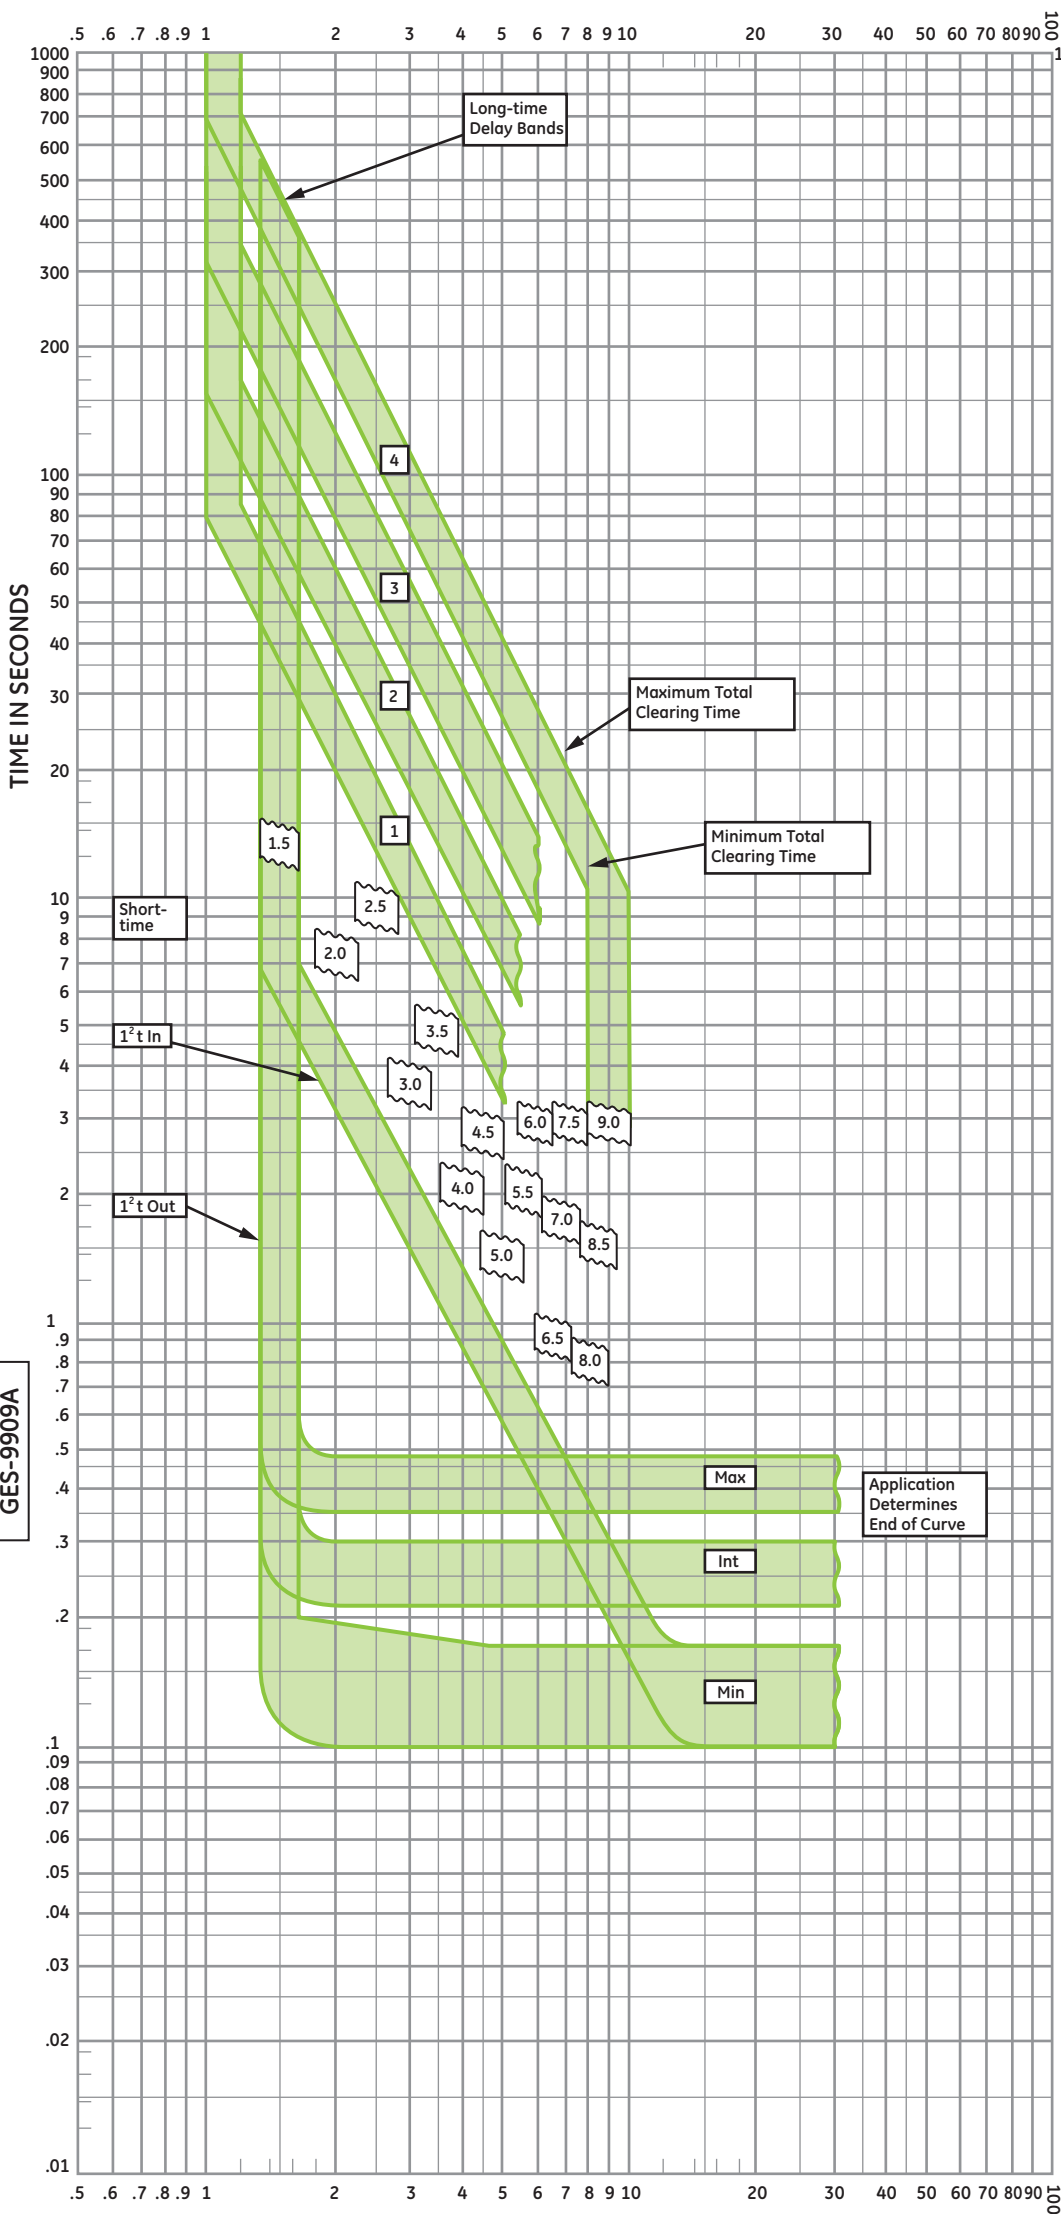

MULTIPLES OF BREAKER SHORT-TIME RATING, H

Type	Breaker		Short-time Rating (H) (Amps. rms symmetrical)
	Max. Frame Amps		
ICCB	800		25,000
	1600, 2000		30,000
	2500, 3000, 4000		42,000

MULTIPLES OF INSTANTANEOUS PICKUP

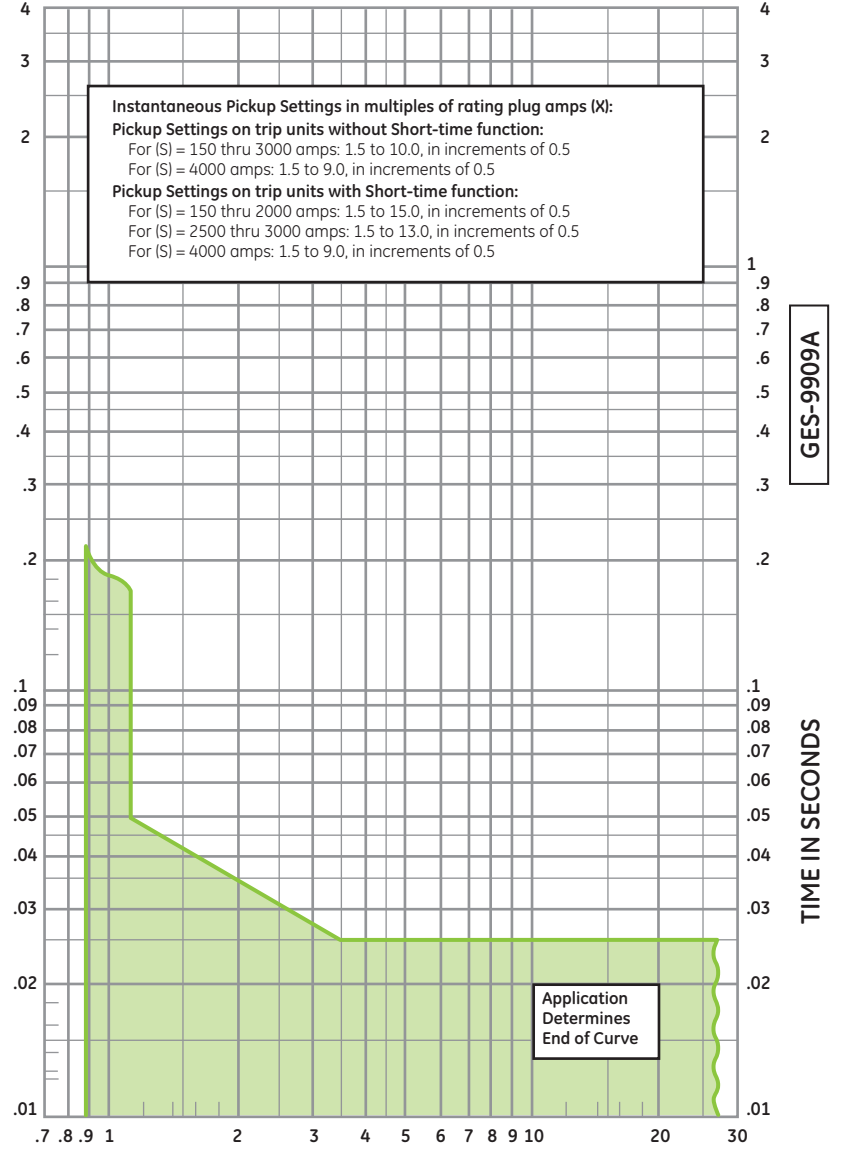

GE Consumer & Industrial - Electrical Distribution

Available Ratings (Amperes)

Type	Breaker Model	Frame	Current Sensor (S)		Rating Plug (X)	
			1000	2000	400	600
MCCB	TRL/TRP	1600	1000		400	600, 800, 1000
			1600		600	800, 1000, 1200, 1600
			2000		800	1000, 1200, 1600, 2000
ICCB	TP/THP/TC/THC	800	200		100	150, 200
			400		150	200, 225, 250, 300, 400
			800		300	400, 500, 600, 700, 800
		1600	1000		400	600, 800, 1000
			1600		600	800, 1000, 1200, 1600
			2000		800	1000, 1200, 1600, 2000
		2500	1000		400	600, 800, 1000
			2000		800	1000, 1200, 1600, 2000
			2500		1600	2000, 2500
		3000	3000		2000	2500, 3000
			4000		1500	2000, 2500, 3000, 4000

Voltage Ratings: 600 Vac, maximum

Insulated Case Circuit Breakers
Types TP, THP, TC, THC

Molded Case Circuit Breakers
R-Frame
with Enhanced MicroVersaTrip Plus™
or MicroVersaTrip PM™ (Series RMS-9C)
Digital RMS Trip Units

Long-time Delay, Short-time Delay, and Instantaneous Time-Current Curves

Curves apply at 50 through 400 Hertz and from -20°C to 55°C breaker ambient

Note: Operation above 60 Hertz requires thermal and interrupting derating of the circuit breaker.

GES-9909A

Adjustments

Long-time Function Current Settings (C): 0.50 to 1.0 in 0.05 increments multiples of rating plug amps (X).
Delay Bands: 1, 2, 3 and 4.

Short-time Function Pickup Settings: 1.5 to 9.0 in 0.5 increments multiples of current setting (C).

Delay Bands: MIN, INT, MAX; I²t In/Out

Instantaneous Function:

See Curves above.

S: Current Sensor Amps

X: Rating Plug Amps

C: Current Setting Amps

H: Breaker Short-time Rating Amps